

VIVAX



Catalogue of air conditioners **2025**

Contents

VIVAX air conditioners 2025	6
Description of functions for VIVAX air conditioners	8
Overview of functions by models	10
Overview of remote and wired controls	12
Outdoor units	14
WALL SPLIT SYSTEMS	
Y Design	18
H+ Design	20
R+ Design	22
N Design	24
M Design	26
Q Design	28
X Design	30
COMMERCIAL MONO SPLIT SYSTEMS	
CT AERI floor split system	34
CF AERI floor-ceiling split system	36
CC AERI cassette split system	38
DT AERI duct split system	40
FS AERI self-standing floor split system	42
MULTI-SPLIT SYSTEMS	
Wall indoor units	46
Floor indoor units	47
Floor-ceiling indoor units	47
Cassette indoor units	48
Duct indoor units	49
Outdoor units	50
Multi-split combinations	52
Overview of outdoor units	54

Why VIVAX?

SAVING ENERGY

VIVAX air conditioners have the highest class of energy efficiency, up to A+++. Exclusive inverter technology ensures savings on energy costs as much as 30%. Each remote control has a "follow me" function for additional savings through intelligent space heating.

HEALTH

VIVAX air conditioners take care of your health. Super ionizer releases a high concentration of positive and negative ions that clean the air of allergens. Bio HEPA filtration system removes particles up to PM 0.3 in the air, ensuring clean and fresh air.

RELIABILITY

VIVAX air conditioners work reliably at all temperatures. Compressor and condenser heaters are controlled by the main processor of the air conditioner, which enables smooth and safe operation of the device at low temperatures, even down to -32 °C. VIVAX air conditioners are very easy to start at low voltage, and the protective valve cover on the outdoor unit prevents condensed water from dripping and protects the valves from external influences.

COMFORT AND PRACTICALITY

VIVAX air conditioners allow you to enjoy the comfort of your home. An intelligent motion sensor automatically identifies human activity in the space and adjusts the climate. The directional air outlet automatically moves horizontally and vertically, efficiently directing the flow. Memorizing the position of the air deflector will remember the last set position before turning off the device. The built-in Wi-Fi module and application enable smart control of air conditioners, so that entering in the room you can feel a perfectly cooled home or a comfortably heated space.



The guarantee for VIVAX air conditioners is 60 months with mandatory installation and mandatory annual service by an authorized service. We believe in the quality of VIVAX air conditioners and guarantee their correctness for up to 5 years. It is a regular warranty on our devices, and after purchase, additional device registration is not required in order to realize the warranty. You can find detailed information on warranty conditions and a list of authorized service providers at vivax.hr/en/.

VIVAX. FOREVER.

2018

The seventh generation of multi-split air conditioners. The sixth generation of commercial air conditioners. Best Buy Award 2018 / 2019.

2019

Popular R Design in new colours. R32 gas in all air conditioners. Corrosion protection agent in outdoor units. Qudal Award 2019 / 2020.

2020

The first generation of heat pumps.

2021

Present in more than 35 countries.

2022

90 different airconditioners in the offer.

2023

Expansion of the air conditioning range to VRF air conditioning systems.

2024



We are proudly celebrating 20 years, always striving not only to provide top quality products, but also a memorable experience.

2025

Opened VIVAX regional training center in Zagreb intended for installers and repairmen of residential and commercial air conditioning.

2004

First VIVAX air conditioners on the market.

2006

The first multi-splits and the first accessories for air conditioners.

2008

The second generation of commercial and multi-split air conditioners.

2013

The fourth generation of multi-split air conditioners. The third generation of commercial air conditioners.

2015

The fifth generation of multi-split air conditioners. The fourth generation of commercial air conditioners. The first Wi-Fi air conditioners, 61 devices in the offer.

2017

It was developed an air conditioner that works at outdoor temperature of -32 °C, both during heating and cooling mode. 73 different air conditioners in the offer.

2005

First inverter, mobile and cassette air conditioners.

2007

The first floor-ceiling air conditioner.

2011

The third generation of multi-split air conditioners.

2014

Super free match system was introduced. 59 air conditioners in the offer.

2016

The sixth generation of multi-split air conditioners. The fifth generation of commercial air conditioners. 65 different air conditioners in the offer.




Present in more than 35 countries

Already 21 years users in **over 35 markets** have had trust in VIVAX air conditioners.

Top quality and timeless design have found their way to many homes, which, thanks to the VIVAX air conditioners and regardless of the season, are always at the optimum temperature.

Africa

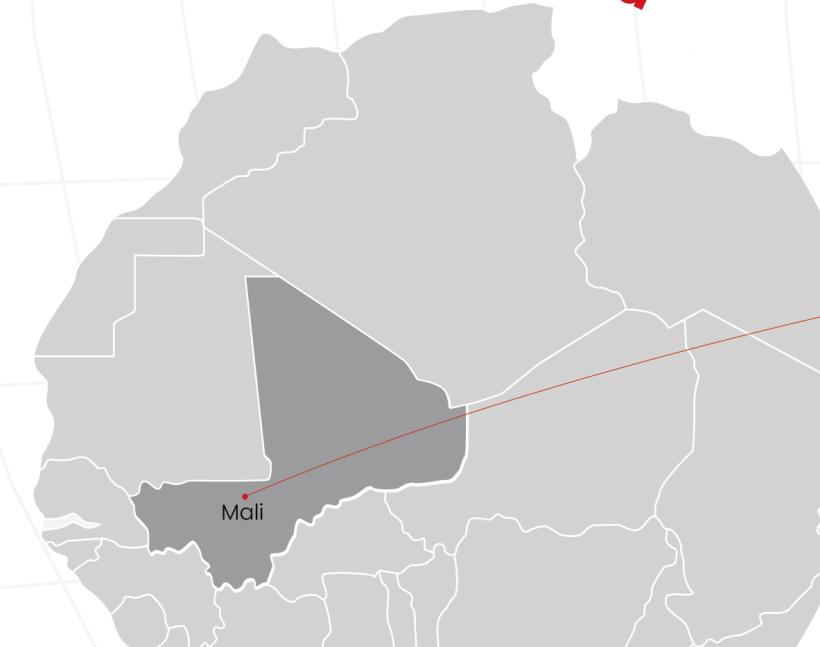



VIVAX air conditioners 2025

Wall split systems

Y Design



3.5 kW

H+ Design



3.5 kW | 5.3 kW



R+ Design



2.6 kW | 3.5 kW | 5.3 kW | 7.0 kW



M Design



2.6 kW | 3.5 kW | 5.3 kW | 7.0 kW

Q Design



2.6 kW | 3.5 kW | 5.3 kW | 7.0 kW


X Design



3.5 kW

Commercial split systems

Floor
split system
CT AERI



3.5 kW | 5.0 kW

Floor-ceiling
split system
CF AERI



5.3 kW | 7.0 kW
10.5 kW | 14.1 kW
15.8 kW

Cassette
split system
CC AERI



3.5 kW | 5.3 kW
7.0 kW | 10.6 kW
14.1 kW | 15.2 kW

Duct
split system
DT AERI



3.5 kW | 5.3 kW
7.0 kW | 10.6 kW
14.1 kW | 15.2 kW

Self-standing floor
split system
FS AERI



7.0 kW | 14.1 kW
16.1 kW


Multi-split systems

Wall indoor unit
AENI



2.1 kW


Wall indoor unit
AERI



2.6 kW | 3.5 kW | 5.3 kW



Wall indoor unit
AEHI



2.6 kW | 3.5 kW | 5.3 kW



Floor indoor unit
CT AERI



2.6 kW | 3.5 kW | 5.0 kW

Floor-ceiling
indoor unit
CF AERI



5.3 kW

Cassette indoor
unit
CC AERI



2.6 kW | 3.5 kW | 5.3 kW

Duct indoor unit
DT AERI



3.5 kW | 5.3 kW

Outdoor unit
COFM AERI



4.1 kW | 5.3 kW | 6.2 kW | 7.9 kW

8.2 kW | 10.6 kW | 12.1 kW

Description of functions for VIVAX air conditioners

ENERGY SAVING



ECO mode

The new VIVAX air conditioners in ECO mode save an additional 60 % through eight-hour mode.



1.0 W Standby

Air conditioner in standby mode consumes 1.0 W of energy per day.



Night mode

The temperature automatically rises or falls slightly to maintain a comfortable room temperature and to reduce energy consumption at the same time.



Biofilter

It is composed of special biological enzyme and eco filters that trap dust, neutralise and destroy bacteria, fungi and microbes.



Catalyst filter

It eliminates toxic gases and unpleasant odours.



Dust filter

Mesh dust filters help to stop dust particles in the air conditioner, thus improving the air quality in the room.



Ionizer

It releases negative ions, eliminates unpleasant odours, dust, smoke and pollen. Provides fresh and clean air.



Anti-corrosion protection - gold coating

Special anti-corrosion coating for the heat exchanger protects from atmospheric phenomena and effects of aggressive environment. It helps in speeding the process of defrosting the unit and better heating efficiency.



The protective cover of the valve

The protection of connecting valves on the outdoor unit prevents dripping of the condensed water and protects the valves from external influences.



Intelligent defrosting

If it is necessary, defrosting is activated automatically. It improves the efficiency of the device when heating and saves energy.



Error detection and display

It displays a description of the error to solve the problem faster and easier.



100 % capacity at -15 °C

Despite the low temperatures, the device works at 100 % capacity.



Cooling in extreme conditions

Allows the device to operate in cooling mode at low outdoor temperatures.



Operation at low voltage

Ability to work in low voltage conditions.



Emergency function

In the case of the temperature sensor error, the ordinary air conditioner will display an error and stop operating while the VIVAX air conditioner will continue to operate, if necessary.



Heating in extreme conditions

The device can be used for room heating at low outdoor temperatures with high efficiency.



PTC compressor and condenser heaters

Additional heaters, one of which is used to reheat the oil in the compressor and the other improves the defrosting of the outdoor unit. Heater operation is controlled via the main processor. This method of control enables uninterrupted and safe operation of the devices when the outside temperature reaches up to -32 °C.



3D DC Inverter

The inverter fan motor of the indoor and outdoor unit empowers the VIVAX air conditioners to provide best-in-class performance.



Wi-Fi ready

The air conditioner has the ability to expand the functions by purchasing a Wi-Fi module that connects to a home wireless network.



Multi compatibility

The indoor unit is compatible with multi-system.



Heating at 8 °C / 10 °C

Protection against subcooling below 8 °C / 10 °C.



Condensate drain pump

Condensate drain pump from the Indoor unit.



Wired control device

The wired control device is installed in a fixed position on the wall.



360° air flow

It enables air to reach every corner of the room with individual air exhaust control from all sides of the air conditioners.



Turbo

Function for the powerful heating or cooling of the room.



Follow me function

The device automatically adjusts the temperature to the desired level with the help of an additional sensor on the remote control.



Silent operation

Possibility to turn off the sound signal when operating the air conditioner for a more comfortable atmosphere.



Auto swing

If the system has an automatic exhaust, then its louvers move up and down on their own.



12 air flow speeds

12 automatic fan speeds of the indoor unit.



Motion detector

With a built-in motion detector, the exhaust adapts to your own wishes and needs.



Soft start

It protects the air conditioner from high electricity voltage during start-up.



Timer

The timer enables the air conditioner to start and stop within 24 hours.



Manual control

The air conditioner can be easily turned on or off by pressing a button located on the outside of the indoor unit.



3 air flow speeds

Possibility to select the fan speed of the indoor unit.



3D air flow

It uses automatic horizontal and vertical movements of the louver to ensure equal air distribution throughout the room.



Humidity control

Smart sensors control the temperature and humidity from 35 % to 85 %.



Wi-Fi control

The air conditioner has a Wi-Fi module that connects to a home wireless network and connects to a mobile application.



Strong air flow

Air exhaust range up to 20 m.



Digital display

Hidden digital display.



Two-way condensate drain hose

A drain hose can be installed on both sides of the indoor unit, making installation easier.



Louver position memory

The air deflectors will automatically return to the position they were in when the air conditioner was turned off.



Automatic operating mode

By selecting this function, the air conditioner automatically sets the fan speed of the Indoor unit and the operating mode, comparing the set temperature and current room conditions.



Last mode memory

The air deflectors will automatically return to the position they were in when the air conditioner was turned off.



Smart airflow

In heating mode the air conditioner blows warm air vertically down to the floor, while in cooling mode the air conditioner blows cold air horizontally up into the ceiling.



Whisper air

Quiet operation of the air conditioner.

Overview of functions by models

MULTI-SPLIT	ECO MODE	1.0W STANDBY	NIGHT MODE	ENERGY SAVING MODE	BIOFILTER	CATALYST FILTER	DUST FILTER	IONIZER	SELF-CLEANING	GOLD COATING	THE PROTECTIVE COVER OF THE VALVE	INTELLIGENT DEFROSTING	ERROR DETECTION AND DISPLAY	REFRIGERANT LEAK DETECTION SENSOR	100 % CAPACITY AT -15 °C	OPERATION AT LOW VOLTAGE	PTC COMPRESSOR AND CONDENSER HEATERS	EMERGENCY FUNCTION	COOLING AT A TEMPERATURE OF -15 °C	COOLING AT A TEMPERATURE OF -32 °C	HEATING AT A TEMPERATURE OF -15 °C	HEATING AT A TEMPERATURE OF -20 °C	HEATING AT A TEMPERATURE OF -25 °C	HEATING AT A TEMPERATURE OF -32 °C	
Y Design	•	•	•		•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
H+ Design	•	•	•	•	•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
R+ Design		•	•	•	•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
N Design	•	•	•	•			•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
M Design		•	•	•	•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
Q Design		•	•	•	•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
X Design		•	•	•	•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
FLOOR SPLIT SYSTEMS	•	•	•	•	•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
FLOOR-CEILING SPLIT SYSTEMS	•	•	•	•	•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
CASSETTE SPLIT SYSTEMS	•	•	•	•	•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
DUCT SPLIT SYSTEMS	•	•	•	•	•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
SELF-STANDING FLOOR SPLIT SYSTEMS	•		•	•			•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
WALL INDOOR UNITS				•	•		•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•
FLOOR INDOOR UNITS				•			•	•																	
FLOOR-CEILING INDOOR UNITS				•			•	•																	
CASSETTE INDOOR UNITS				•			•	•																	
DUCT INDOOR UNITS				•			•	•																	
OUTDOOR UNITS				•														•	•	•	•	•	•	•	•

Overview of remote and wired controls

Remote control

RG10N2 (D2S)

CC AERI (7.0 kW, 12.0 kW,
14.0 kW, 16.0 kW)



Remote control RG10A (D2S)

CT AERI

CF AERI

CC AERI (3.5 kW, 5.0 kW)

DT AERI

FS AERI



FAN button

The FUN function selects the fan speed in the following order:
AUTO %, 20 %, 40 %, 60 %, 80 %, 100 %.

Wired control VIVAX-KJR-120N

CC AERI

CF AERI

DT AERI



TIMER button
The TIMER button sets daily and weekly timer.

DAY OFF / DELAY button

The DAY OFF and DELAY functions let you pause or delay your air conditioning unit without resetting the TIMER, keeping your preset schedule intact.

ECO GEAR button
The ECO GEAR function allows to enter into the energy-efficient mode in the following order:
ECO > GEAR (75 %) > GEAR (50 %) >
Previous setting mode > ECO.



Remote control
RG10P1(G2HS)/BGEF
Y Design R32

INTELLIGENT EYE button

The INTELLIGENT EYE function detects the activities of the people in the room to save energy.

HUMIDITY button

The HUMIDITY function adjusts the humidity in the room during dry operation in the range of 35 % ~ 85 %. Press the button to increase humidity in the span of 5 %.



Remote control
RG10B1(E)/BGEF
R+ Design R32

CLEAN button

The CLEAN function enables or disables self-cleaning of the air conditioner.



Remote control
RG10X1(G2HS)/BGEF
H+ Design R32

CASCADE button

The CASCADE function allows the entire room to be cooled evenly.



Remote control
RG10B1(E)/BGEF
N Design R32

SWING button

The SWING function allows control of the horizontal air louver.

TURBO button

The TURBO function allows reaching of the desired temperature in the shortest possible time.



Remote control
RG10A1(D)/BGEF
M Design
Q Design
X Design

SET button

The SET function allows selection of the additional circle-functions as Follow me function or AP mode.

Outdoor unit


1 Improved fan and air exhaust duct

Based on natural models and bionic principles, VIVAX fan blade design effectively reduces airflow resistance and noise. Together with the optimized air duct, it delivers the same volume of air flow with 30 % lower energy consumption.



2 Inverter control panel

The V-PAM inverter control panel reduces the effects of magnetic circle and increases the maximum speed and efficiency of the compressor using vector control technology. This technology achieves further miniaturisation, greater efficiency and better performance.

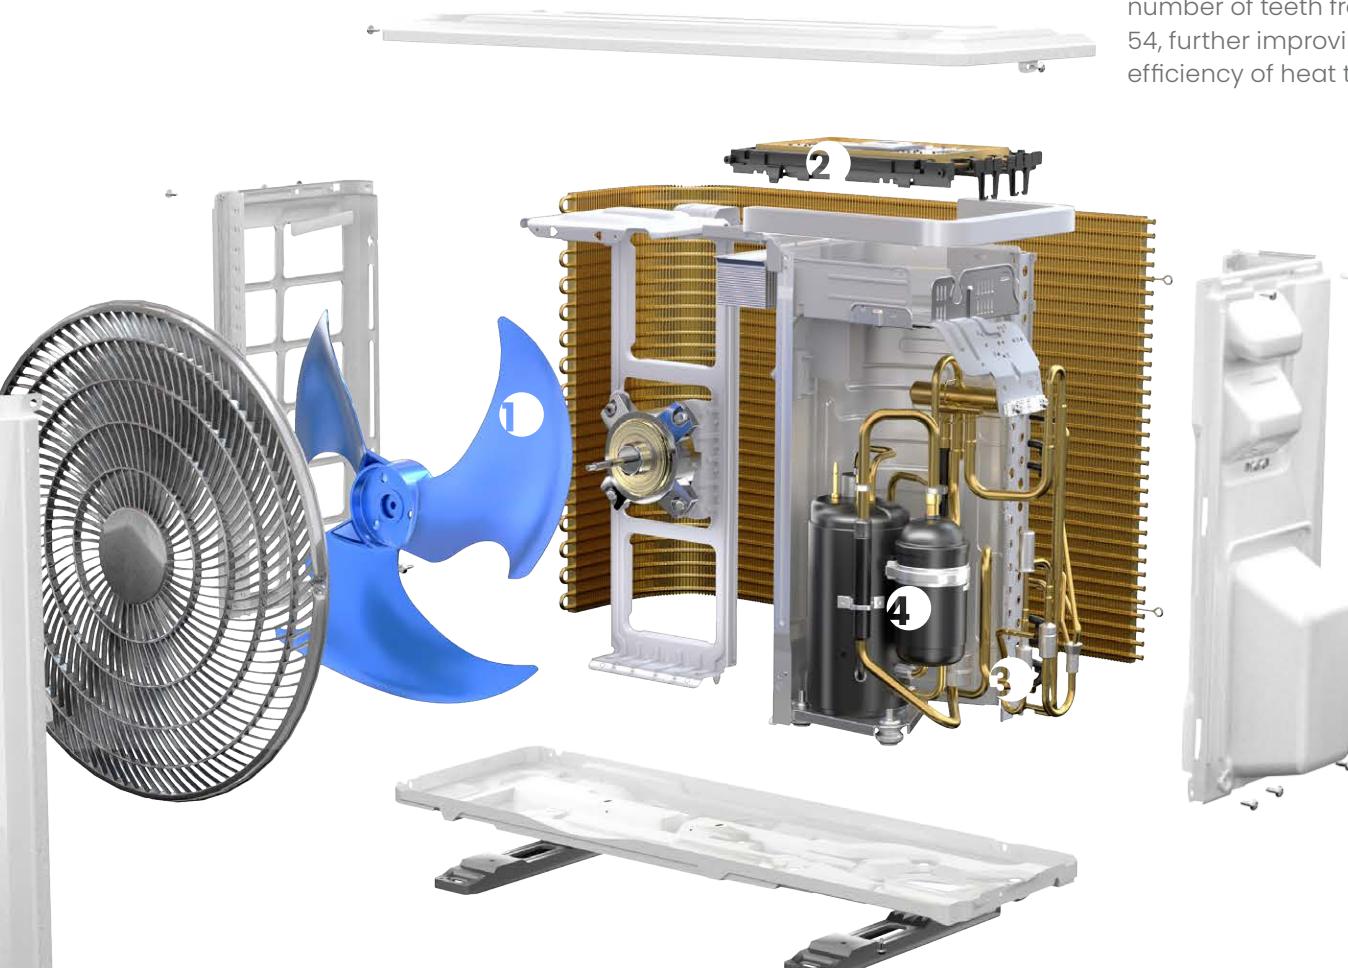


4 Twin rotary compressor

The twin rotary compressor is a system that rotates at a symmetrical angle of 180° ensuring low vibration and noise due to low torque.

3 Inner hose of the heat exchanger

A more densely serrated shape was applied to the tubular copper parts to increase the heat exchange area. The latest heat exchanger has increased number of teeth from 45 to 54, further improving the efficiency of heat transfer.

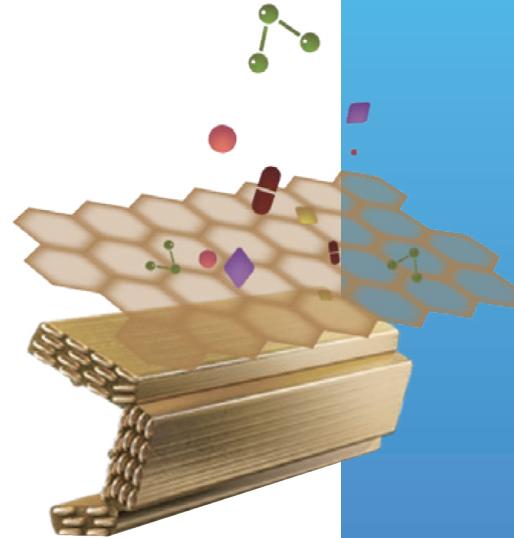

Golden Fin technology

The VIVAX air conditioner equipped with Golden Fin technology is more resistant to rust caused by moisture, accelerates the defrosting cycle of the outdoor unit, harder to attract grease, oxidative and other corrosive substances than Blue Fin technology commonly used to protect heat exchangers in air conditioners.





Wall split systems

DC inverter





VIVAX TECHNOLOGY FOR HEALTH

The ionizer in VIVAX air conditioners ionizes the air releasing positive and negative ions for air sterilization with an efficiency of up to 97.5 %. During ionization, the particles in the air become heavier and fall to the ground, after which they are easily cleaned. This process allows breathing cleaner air from which pollutants, allergens, bacteria and viruses are removed, and thus at the same time increases blood oxygen levels, improves metabolism, concentration and alertness.



HIGHEST ENERGY EFFICIENCY CLASS IN HEATING AND COOLING

With VIVAX air conditioners, it could be enjoyed both heating and cooling your home with the highest energy efficiency class, while saving significantly. Among the VIVAX air conditioners, you can find devices that maintain a 100 % operating capacity of down to -15 °C. This means that even at such a low temperature, you will get up to 5.3 kW of heating energy for 1 kW of electricity consumed.

3D Inverter

Top performance for endless challenges. The exclusive inverter compressor and fan inverter motor technology of indoor and outdoor units empowers VIVAX air conditioners to provide best-in-class performance, power, efficiency, speed and stability in all conditions throughout the life cycle of the unit.



WI-FI AIR CONDITIONER CONTROL

Ability to access the VIVAX air conditioner at any time and from anywhere, thanks to the built-in Wi-Fi module and the VIVAX exclusive air conditioning control application. One touch on the mobile device selects the desired temperature - in the summer months you enter a perfectly cooled home, and in the winter in an optimally heated space. In addition to switching on and off, a timer can be set via the mobile app, find out in which mode the air conditioner is operating or a potential malfunction can be diagnosed.




PEACEFUL SLEEP WITH QUIET WORK

Enjoy pleasant and quiet nights with minimal noise up to 18.4 dB.



Wall split system
Y Design

A+++ Cooling SEER 9.2
A+++ Heating SCOP 5.3

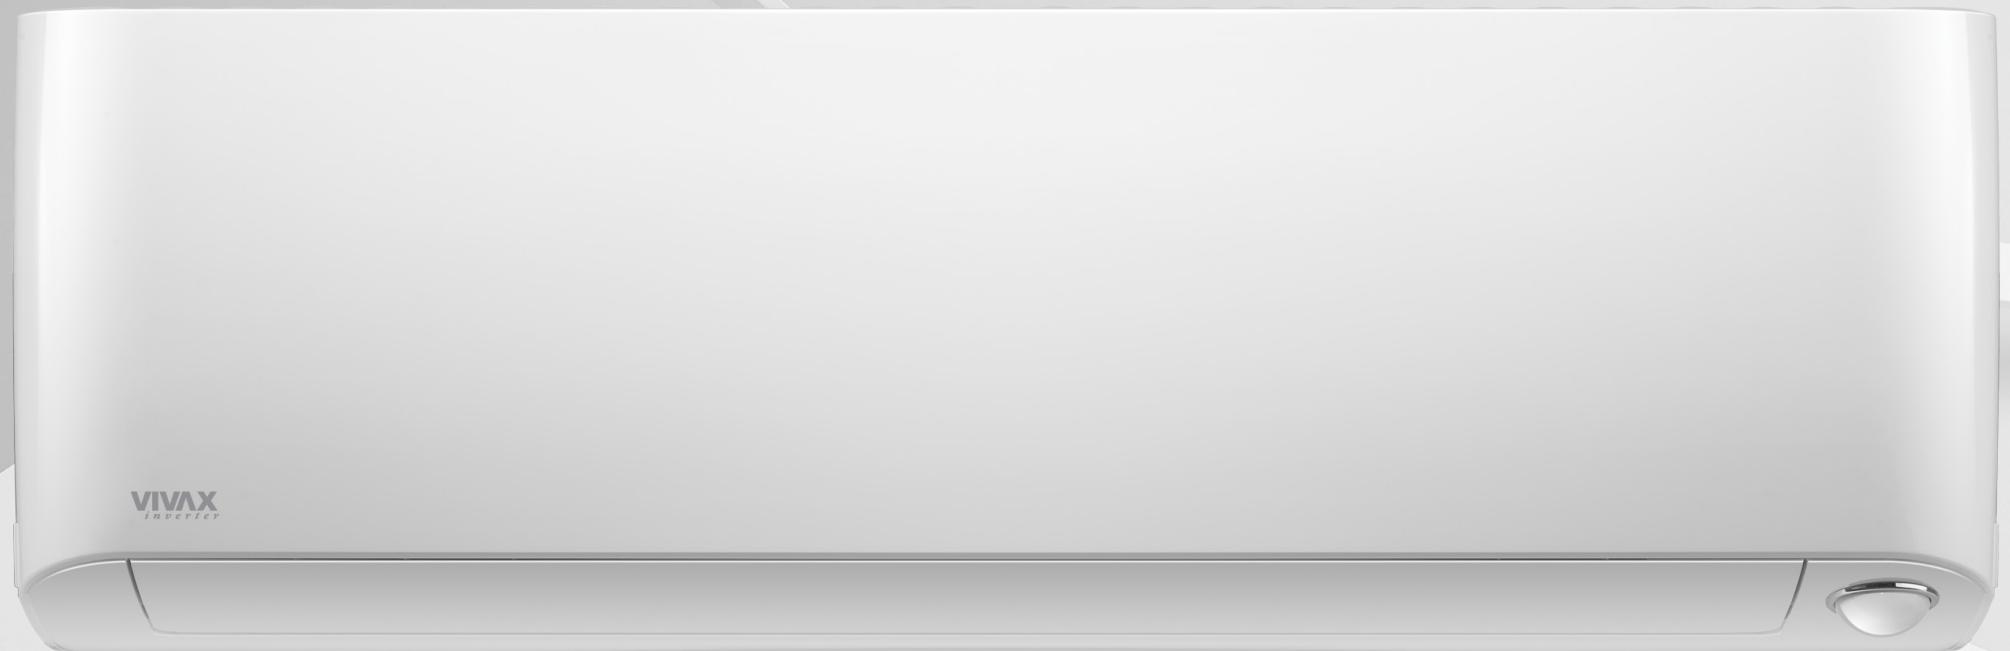

ENERGY SAVING



R32
gas



Night
mode



Dust filter
Self-cleaning



Biofilter



Cooling at
a temp. of
-32 °C



Heating at
a temp. of
-32 °C



3D DC
Inverter



Error detection
and display



Refrigerant
leak detection
sensor



Emergency
function



Last mode
memory



Timer



Louver
position
memory



Motion
detector



3 air flow
speeds



Heating
at 8 °C



Automatic
operating
mode



Turbo



Digital
display



Humidity
control

Model	ACP-12CH35AEYIs R32
Capacity (W)	3517 (1031~4816)
Energy efficiency class	A+++
Energy Efficiency SEER	9.2
Cooling operating range	-32 °C ≤ T ≤ 50 °C
Estimated load on cooling (W)	3500
Power input (W)	748 (102~1955)
Capacity (W)	4250 (753~7200)
Energy efficiency class	A+++
Energy Efficiency SCOP	5.3
Heating operating range	-32 °C ≤ T ≤ 30 °C
Estimated load on heating (W)	2200
Power input (W)	924 (104~2625)
Air flow (m³ / h) - HI / MID / LOW	575 / 497 / 340
Dehumidifying capacity (L / h)	1.2
Noise - Sound Pressure (dB (A)) - HI / MID / LOW / SI	43 / 34 / 24 / 21
Sound power level (dB)	≤ 59
Packaging dimensions (mm)	985 x 370 x 350
Product dimensions (mm)	895 x 248 x 298
Gross / net weight (kg)	17.5 / 12.7
Noise - Sound Pressure (dB (A))	≤ 55.5
Sound power level (dB)	≤ 60
Refrigerant	R32
Bracket distance (mm)	511
Packaging dimensions (mm)	915 x 370 x 615
Product dimensions (mm)	805 x 330 x 554
Gross / net weight (kg)	34.8 / 32.3
Liquid phase pipe diameter	1 / 4"
Gas phase pipe diameter	3 / 8"
Maximum pipe length (m)	25
Maximum height difference (m)	10
Pre-filled pipe length (m)	5
Gas refill (g / m)	12
Power interconnect cable (mm²)	5 x 1.5
Power Supply IU / OU 220-240 V / 1 / 50 Hz (mm²)	3 x 1.5

Cooling

Heating

Indoor unit

Outdoor unit

Connections

Power Supply

A+++ Heating & cooling



Advanced inverter technology enables the air conditioner to operate efficiently and in very extreme weather conditions. It can be enjoyed in heating even at an outdoor temperature of -32 °C, and with 100 % capacity down to -15 °C.

OPERATION AT FULL CAPACITY AT -15 °C

When temperatures drop to as low as -15 °C, VIVAX air conditioners from the Y Design series continue to operate at full capacity. In the case of such low temperatures, air conditioners in this series produce 5.3 kW of heating energy.

Motion sensor

The intelligent motion sensor can automatically identify human activity in the room and adjust the operation of the air conditioner accordingly. When people are in the room, strong cooling is activated, and when they leave it, the device continues to operate at a reduced speed.




Wall split system

H+ Design



A+++ Cooling SEER 8.5
A++ Heating SCOP 4.6



ENERGY SAVING



HEALTH




RELIABILITY



COMFORT AND CONVENIENCE



Smart airflow

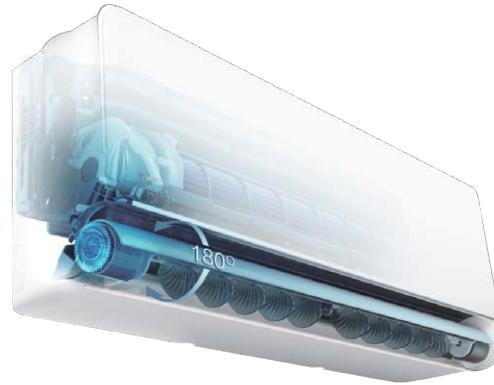

The innovative 180° wing movement allows air to flow in the horizontal or vertical direction. This option allows you to never feel the direct airflow towards you.



HORIZONTAL AIRFLOW



VERTICAL AIRFLOW



A+++ | A++

H+ series is equipped with the latest technology for energy efficiency, which achieves significant energy savings. The A+++ energy class in cooling and the A++ energy class in heating confirm this.

Model	ACP-12CH35AEHI+ R32	ACP-18CH50AEHI+ R32
Capacity (W)	3517 (1319~4308)	5275 (1817~6007)
Energy efficiency class	A+++	A++
Energy Efficiency SEER	8.5	6.3
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Estimated load on cooling (W)	3500	5300
Power input (W)	900 (130~1650)	1600 (140~2300)
Capacity (W)	3810 (879~4396)	5569 (1260~6008)
Energy efficiency class	A++	A+
Energy Efficiency SCOP	4.6	4.1
Heating operating range	-25 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 240 °C
Estimated load on heating (W)	2500	4100
Power input (W)	950 (120~1500)	1680 (220~2350)
Air flow (m³ / h) - HI / MID / LOW	700 / 515 / 425	750 / 530 / 430
Dehumidifying capacity (L / h)	1.2	1.8
Noise - Sound Pressure (dB (A)) - HI / MID / LOW	40 / 32.5 / 21.5 / 19	41.5 / 36.5 / 33.5 / 19
Sound power level (dB)	53	54
Packaging dimensions (mm)	1005 x 385 x 295	1005 x 385 x 295
Product dimensions (mm)	920 x 321 x 211	920 x 321 x 211
Gross / net weight (kg)	14.16 / 11.30	14.4 / 11.30
Noise - Sound Pressure (dB (A))	≤ 53.5	≤ 54.5
Sound power level (dB)	≤ 62	≤ 63
Refrigerant	R32	R32
Bracket distance (mm)	452	511
Packaging dimensions (mm)	887 x 337 x 610	915 x 370 x 615
Product dimensions (mm)	765 x 303 x 555	805 x 330 x 554
Gross / net weight (kg)	28.8 / 26.4	36.1 / 33.5
Liquid phase pipe diameter	1 / 4"	1 / 4"
Gas phase pipe diameter	3 / 8"	1 / 2"
Maximum pipe length (m)	25	30
Maximum height difference (m)	10	20
Pre-filled pipe length (m)	5	5
Gas refill (g / m)	12	12
Power interconnect cable (mm²)	1.5 x 5	1.5 x 5
Power Supply IU / OU 220-240 V / 1 / 50 Hz (mm²)	1.5 x 3	1.5 x 3

Power Supply



Wall split system

R+ Design

A+++ Cooling SEER 9.3
A++ Heating SCOP 4.6



ENERGY SAVING

R32 gas	Night mode	Dust filter	Biofilter	Cooling at a temp. of -15 °C	Heating at a temp. of -25 °C	3D DC Inverter	Error detection and display	Refrigerant leak detection sensor	Emergency function	Last mode memory	Timer	Louver position memory	Multi compatibility	3 air flow speeds	Heating at 8 °C	Automatic operating mode	Turbo	Digital display

Model	ACP-09CH25AERI+ R32	ACP-12CH35AERI+ R32	ACP-18CH50AERI+ R32	ACP-24CH70AERI+ R32
Capacity (W)	2638 (1026~3224)	3517 (1377~4308)	5275 (3391~5900)	7034 (2110~8206)
Energy efficiency class	A+++	A+++	A++	A++
Energy Efficiency SEER	9.3	8.5	7	6.5
Cooling operating range	-15 °C ≤ T ≤ 50 °C			
Estimated load on cooling (W)	2600	3500	5300	7000
Power input (W)	613 (90~1140)	977 (130~1650)	1550 (158~2250)	2340 (340~3450)
Capacity (W)	2931 (821~3370)	3810 (1067~4381)	5568 (3101~5850)	7327 (1553~8206)
Energy efficiency class	A++	A++	A+	A+
Energy Efficiency SCOP	4.6	4.6	4.0	4.0
Heating operating range	-25 °C ≤ T ≤ 24 °C	-25 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
Estimated load on heating (W)	2400	2600	4100	4900
Power input (W)	637 (110~1080)	977 (160~1560)	1500 (220~2350)	2130 (300~3150)
Air flow (m³ / h) - HI / MID / LOW	483 / 362 / 303	584 / 477 / 395	730 / 500 / 420	1020 / 830 / 640
Dehumidifying capacity (L / h)	1.0	1.2	1.8	2.4
Noise - Sound Pressure (dB (A)) - HI / MID / LOW / SI	36.5 / 29 / 24 / 20	39.5 / 33 / 25 / 21	43 / 33.5 / 28 / 23	47 / 41.5 / 30.5 / 25
Sound power level (dB)	≤ 55	≤ 55	≤ 58	≤ 63
Packaging dimensions (mm)	875 x 285 x 380	875 x 285 x 380	1045 x 305 x 410	1155 x 415 x 320
Product dimensions (mm)	802 x 189 x 297	802 x 189 x 297	965 x 215 x 319	1080 x 226 x 335
Gross / net weight (kg)	11.1 / 8.6	11.1 / 8.6	14.2 / 10.9	17.3 / 13.7
Noise - Sound Pressure (dB (A))	≤ 54	≤ 54.5	≤ 55.5	≤ 60.5
Sound power level (dB)	≤ 60	≤ 62	≤ 64	≤ 66
Refrigerant	R32	R32	R32	R32
Bracket distance (mm)	452	452	511	663
Packaging dimensions (mm)	887 x 337 x 610	887 x 337 x 610	915 x 370 x 615	995 x 398 x 740
Product dimensions (mm)	765 x 303 x 555	765 x 303 x 555	805 x 330 x 554	890 x 342 x 673
Gross / net weight (kg)	28.8 / 26.4	28.7 / 26.4	36.1 / 33.5	46.9 / 43.9
Liquid phase pipe diameter	1 / 4"	1 / 4"	1 / 4"	3 / 8"
Gas phase pipe diameter	3 / 8"	3 / 8"	1 / 2"	5 / 8"
Maximum pipe length (m)	25	25	30	50
Maximum height difference (m)	10	10	20	25
Pre-filled pipe length (m)	5	5	5	5
Gas refill (g / m)	12	12	12	24
Power interconnect cable (mm²)	5 x 1.5	5 x 1.5	5 x 1.5	5 x 2.5
Power Supply IU / OU 220-240 V / 1 / 50 Hz (mm²)	3 x 1.5	3 x 1.5	3 x 1.5	3 x 2.5

Cooling

Heating

Indoor unit

Outdoor unit

Connections

Power Supply



A+++ | A++

IMPROVED ENERGY EFFICIENCY

R+ Design is a new improved generation of air conditioners, which has energy efficiency A+++ in cooling and A++ in heating.



R+ Design air conditioner operates with 107 % capacity at 2 °C and can be used even when temperatures drop down to -25 °C.

Wall split system N Design

A++ Cooling SEER 7.0
A+ Heating SCOP 4.2



ENERGY SAVING



R32 gas
Night mode
Energy saving mode



1.0 W Standby
ECO mode

HEALTH



Dust filter
Self-cleaning



Anti-corrosion protection - gold coating
Catalyst filter

RELIABILITY



Cooling at a temp. of -15 °C
Heating at a temp. of -20 °C



3D DC Inverter
Error detection and display



Refrigerant leak detection sensor
Intelligent defrosting



Operation at low voltage
Emergency function

COMFORT AND CONVENIENCE



Last mode memory



Timer



Louver position memory



3 air flow speeds



Automatic operating mode



Turbo



Digital display



3D air flow



Manual control



Silent operation



Auto swing



12 air flow speeds



Soft start




Wi-Fi ready



Heating at 8 °C

Model	ACP-09CH25AENI R32	ACP-12CH35AENI R32	ACP-18CH50AENI R32
Capacity (W)	2638 (1026~3224)	3517 (1377~4308)	5275 (1934~6272)
Energy efficiency class	A++	A++	A++
Energy Efficiency SEER	7.4	7.0	7.0
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Estimated load on cooling (W)	2800	3600	5300
Power input (W)	733 (80~1100)	1096 (120~1650)	1550 (150~2250)
Capacity (W)	2931 (821~3370)	3810 (1070~4381)	5568 (1290~7004)
Energy efficiency class	A+	A+	A+
Energy Efficiency SCOP	4.1	4.2	4.0
Heating operating range	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
Estimated load on heating (W)	2500	2500	4200
Power input (W)	771 (70~990)	1027 (110~1480)	1630 (220~2350)
Air flow (m³ / h) - HI / MID / LOW	460 / 330 / 260	530 / 400 / 350	800 / 600 / 500
Dehumidifying capacity (L / h)	1.0	1.2	1.8
Noise - Sound Pressure (dB (A)) - HI / MID / LOW / SI	37 / 32 / 22 / 20	37 / 32 / 22 / 21	41 / 37 / 31 / 20
Sound power level (dB)	54	≤ 55	≤ 56
Packaging dimensions (mm)	790 x 270 x 375	875 x 380 x 285	1045 x 305 x 405
Product dimensions (mm)	726 x 210 x 291	802 x 200 x 295	971 x 228 x 321
Gross / net weight (kg)	8.0 / 10.5	11.5 / 8.7	14.6 / 11.2
Noise - Sound Pressure (dB (A))	≤ 55.5	≤ 56	≤ 57
Sound power level (dB)	≤ 62	≤ 62	≤ 65
Refrigerant	R32	R32	R32
Bracket distance (mm)	452	452	511
Packaging dimensions (mm)	835 x 300 x 540	835 x 300 x 540	915 x 370 x 615
Product dimensions (mm)	720 x 270 x 495	720 x 270 x 495	805 x 330 x 554
Gross / net weight (kg)	23.5 / 25.4	25.5 / 23.7	36.1 / 33.5
Liquid phase pipe diameter	1 / 4"	1 / 4"	1 / 4"
Gas phase pipe diameter	3 / 8"	3 / 8"	1 / 2"
Maximum pipe length (m)	25	25	30
Maximum height difference (m)	10	10	20
Pre-filled pipe length (m)	5	5	5
Gas refill (g / m)	12	12	12
Power interconnect cable (mm²)	5 x 1,5	5 x 1,5	5 x 1,5
Power Supply IU / OU 220-240 V / 1 / 50 Hz (mm²)	3 x 1,5	3 x 1,5	3 x 1,5

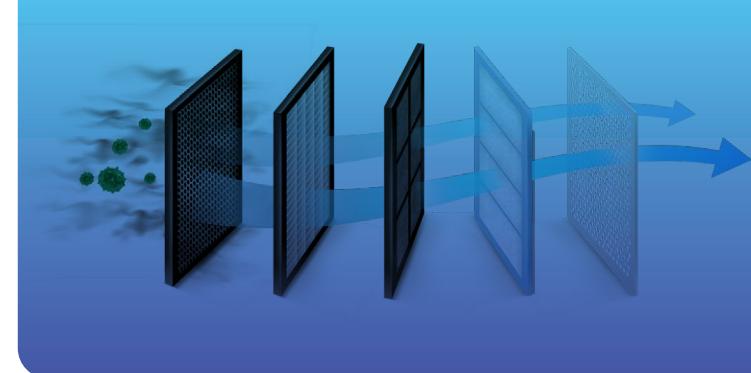

Double filter

The dual filtration system thoroughly eliminates harmful substances, ensuring fresh and clean air. The pre-filter effectively prevents the spread of airborne particles. The second activated carbon filter traps hazardous gases and odours.

COMPRESSOR HEATER

During the operation of the device in heating mode, the compressor heater warms the oil in the compressor before its activation. This ensures optimal operating conditions for the compressor in low ambient temperatures and extends the system's lifespan.




PAN HEATER

While the device is in heating mode operation, the pan heater prevents condensate in the pan from freezing, protecting the components of the air conditioner's outdoor unit from potential damage.



Wall split system **M Design**

A++ Cooling SEER 7.4
A+ Heating SCOP 4.0

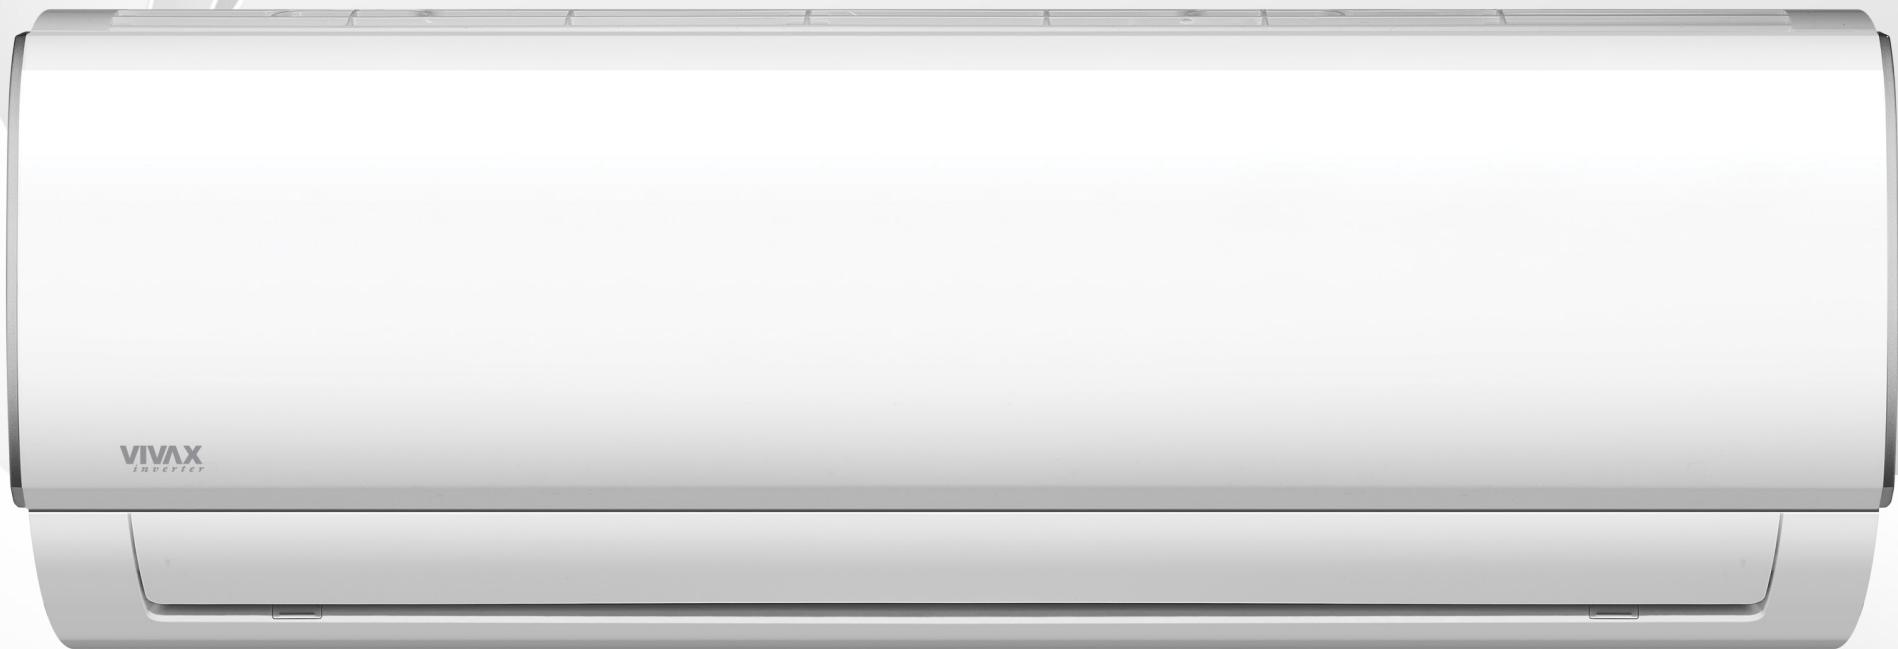

ENERGY SAVING



R32
gas



Night
mode

HEALTH



Dust filter



Self-cleaning

RELIABILITY



Cooling at a
temp. of
-15 °C



Heating at a
temp. of
-15 °C



3D DC
Inverter



Error detection
and display



Refrigerant
leak detection
sensor

COMFORT AND CONVENIENCE



Last mode
memory



Timer



Louver
position
memory



3 air flow
speeds



Automatic
operating
mode



Turbo




Multi
compatibility

Model	ACP-09CH25AEMI+ R32	ACP-12CH35AEMI+ R32	ACP-18CH50AEMIs R32	ACP-24CH70AEMIs R32
Capacity (W)	2638 (909~3400)	3517 (1114~4162)	5275 (3391~5832)	7034 (2081~7913)
Energy efficiency class	A++	A++	A++	A++
Energy Efficiency SEER	7.0	6.5	7.4	6.1
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Estimated load on cooling (W)	2600	3500	5200	7000
Power input (W)	800 (100~1240)	1320 (83~1600)	1550 (140~2300)	2600 (420~3150)
Capacity (W)	2930 (909~3370)	3810 (1084~4162)	5570 (3100~5850)	7330 (1610~7910)
Energy efficiency class	A+	A+	A+	A+
Energy Efficiency SCOP	4.1	4.1	4.0	4.0
Heating operating range	-15 °C ≤ T ≤ 30 °C	-15 °C ≤ T ≤ 30 °C	-15 °C ≤ T ≤ 30 °C	-15 °C ≤ T ≤ 30 °C
Estimated load on heating (W)	2300	2800	4100	4800
Power input (W)	930 (120~1200)	1190 (167~1400)	1570 (220~2350)	2400 (300~2750)
Air flow (m³ / h) - HI / MID / LOW	435 / 333 / 259	530 / 430 / 310	840 / 680 / 540	980 / 817 / 662
Dehumidifying capacity (L / h)	1.0	1.2	1.8	2.4
Noise - Sound Pressure (dB (A)) - HI / MID / LOW / SI	37 / 32 / 25 / 21.5	39.5 / 35.5 / 25 / 21.5	42.5 / 36 / 26 / 20	45 / 40.5 / 36 / 29.5
Sound power level (dB)	≤ 50	≤ 54	≤ 56	≤ 59
Packaging dimensions (mm)	780 x 270 x 365	870 x 270 x 365	1035 x 295 x 385	1120 x 405 x 315
Product dimensions (mm)	715 x 194 x 285	805 x 194 x 285	957 x 213 x 302	1040 x 220 x 327
Gross / net weight (kg)	8.8 / 6.7	9.5 / 7.3	13.0 / 10.0	15.8 / 12.3
Noise - Sound Pressure (dB (A))	≤ 55	≤ 55	≤ 56	≤ 59
Sound power level (dB)	≤ 59	≤ 64	≤ 63	≤ 67
Refrigerant	R32	R32	R32	R32
Bracket distance (mm)	452	452	511	663
Packaging dimensions (mm)	835 x 300 x 540	835 x 300 x 540	915 x 370 x 615	995 x 398 x 740
Product dimensions (mm)	720 x 270 x 495	720 x 270 x 495	805 x 330 x 554	890 x 342 x 673
Gross / net weight (kg)	22.8 / 21.0	22.8 / 21.0	35.4 / 32.7	45.9 / 42.9
Liquid phase pipe diameter	1 / 4"	1 / 4"	1 / 4"	3 / 8"
Gas phase pipe diameter	3 / 8"	3 / 8"	1 / 2"	5 / 8"
Maximum pipe length (m)	25	25	30	50
Maximum height difference (m)	10	10	20	25
Pre-filled pipe length (m)	5	5	5	5
Gas refill (g / m)	12	12	12	24
Power interconnect cable (mm²)	5 x 1.5	5 x 1.5	5 x 1.5	5 x 2.5
Power Supply IU / OU 220-240 V / 1 / 50 Hz (mm²)	3 x 1.5	3 x 1.5	3 x 1.5	3 x 2.5

BIO FILTRATION SYSTEM

It is composed of special biological enzyme and eco filters that trap dust, neutralise and destroy bacteria, fungi and microbes.

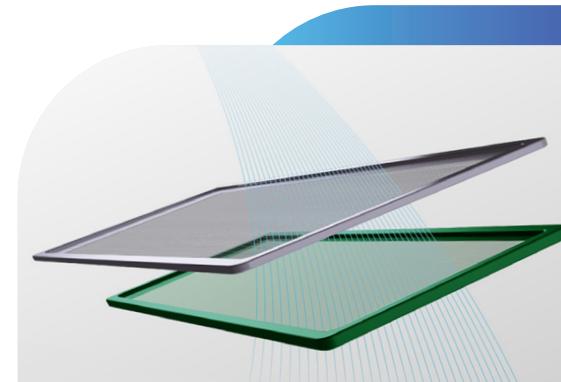

REMOTE CONTROL

The M Design series allows to control the air conditioners wherever you are, with the addition of a Wi-Fi module. V-Smart technology in this series of air conditioners does not only focus on management, but delivers a complete solution depending on the daily needs of consumers.



Wall split system

Q Design

A++ Cooling SEER 7.4
A+ Heating SCOP 4.0



ENERGY SAVING



R32 gas



Night mode



1.0 W Standby



Energy saving mode

HEALTH



Dust filter



Self-cleaning



Anti-corrosion protection - gold coating



Catalyst filter

RELIABILITY



Cooling at a temp. of -15°C



Heating at a temp. of -15°C



3D DC Inverter



Error detection and display



The protective cover of the valve



Intelligent defrosting



Operation at low voltage



Refrigerant leak detection sensor

COMFORT AND CONVENIENCE



Last mode memory



Timer



Louver position memory



3 air flow speeds



Automatic operating mode



Turbo



Manual control



Two-way condensate drain hose



Auto swing



Soft start




Digital display

Model	ACP-09CH25AEQI+ R32	ACP-12CH35AEQI+ R32	ACP-18CH50AEQIs R32	ACP-24CH70AEQIs R32
Capacity (W)	2638 (909~3400)	3517 (1114~4162)	5275 (3391~5832)	7034 (2081~7913)
Energy efficiency class	A++	A++	A++	A++
Energy Efficiency SEER	7.0	6.5	7.4	6.1
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Estimated load on cooling (W)	2600	3500	5200	7000
Power input (W)	800 (100~1240)	1320 (83~1600)	1550 (140~2300)	2600 (420~3150)
Capacity (W)	2930 (909~3370)	3810 (1084~4162)	5570 (3100~5850)	7330 (1610~7910)
Energy efficiency class	A+	A+	A+	A+
Energy Efficiency SCOP	4.1	4.1	4.0	4.0
Heating operating range	-15 °C ≤ T ≤ 30 °C	-15 °C ≤ T ≤ 30 °C	-15 °C ≤ T ≤ 30 °C	-15 °C ≤ T ≤ 30 °C
Estimated load on heating (W)	2300	2800	4100	4800
Power input (W)	930 (120~1200)	1190 (167~1400)	1570 (220~2350)	2400 (300~2750)
Air flow (m³ / h) - HI / MID / LOW	435 / 333 / 259	530 / 430 / 310	840 / 680 / 540	980 / 817 / 662
Dehumidifying capacity (L / h)	1.0	1.2	1.8	2.4
Noise - Sound Pressure (dB (A)) - HI / MID / LOW / SI	37 / 32 / 25 / 21.5	39.5 / 35.5 / 25 / 21.5	42.5 / 36 / 26 / 20	45 / 40.5 / 36 / 29.5
Sound power level (dB)	≤ 50	≤ 54	≤ 56	≤ 59
Packaging dimensions (mm)	780 x 270 x 365	870 x 270 x 365	1035 x 295 x 385	1120 x 405 x 315
Product dimensions (mm)	715 x 194 x 285	805 x 194 x 285	957 x 213 x 302	1040 x 220 x 327
Gross / net weight (kg)	8.8 / 6.7	9.5 / 7.3	13.0 / 10.0	15.8 / 12.3
Noise - Sound Pressure (dB (A))	≤ 55	≤ 55	≤ 56	≤ 59
Sound power level (dB)	≤ 59	≤ 64	≤ 63	≤ 67
Refrigerant	R32	R32	R32	R32
Bracket distance (mm)	452	452	511	663
Packaging dimensions (mm)	835 x 300 x 540	835 x 300 x 540	915 x 370 x 615	995 x 398 x 740
Product dimensions (mm)	720 x 270 x 495	720 x 270 x 495	805 x 330 x 554	890 x 342 x 673
Gross / net weight (kg)	22.8 / 21	22.8 / 21.0	35.4 / 32.7	45.9 / 42.9
Liquid phase pipe diameter	1 / 4"	1 / 4"	1 / 4"	3 / 8"
Gas phase pipe diameter	3 / 8"	3 / 8"	1 / 2"	5 / 8"
Maximum pipe length (m)	25	25	30	50
Maximum height difference (m)	10	10	20	25
Pre-filled pipe length (m)	5	5	5	5
Gas refill (g / m)	12	12	12	24
Power interconnect cable (mm²)	5 x 1.5	5 x 1.5	5 x 1.5	5 x 2.5
Power Supply IU / OU 220-240 V / 1 / 50 Hz (mm²)	3 x 1.5	3 x 1.5	3 x 1.5	3 x 2.5



SELF-CLEANING

After switching off the air conditioner, the Indoor unit continues to operate, drying and cleaning the remaining condensate, thus protecting health.

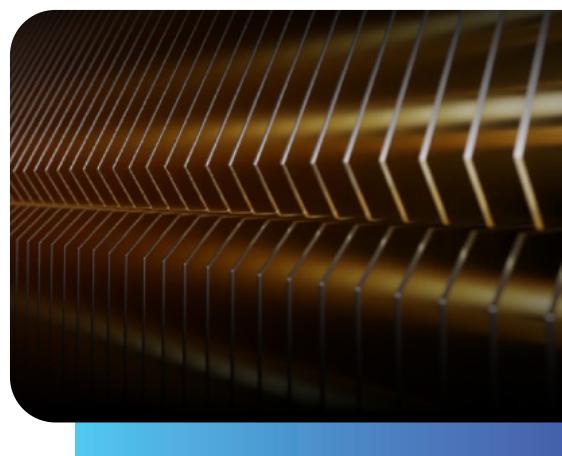

ANTI-CORROSION PROTECTION - GOLD COATING

Special anti-corrosion coating for the heat exchanger protects from atmospheric phenomena and effects of aggressive environment. It helps in speeding the process of defrosting the unit and better heating efficiency.

Wall split system X Design

A++ Cooling SEER 6.5
A+ Heating SCOP 4.1



ENERGY SAVING



R32
gas



Night
mode

HEALTH



Dust filter



Self-cleaning



Anti-corrosion
protection -
gold coating



Catalyst filter

RELIABILITY



Cooling at a
temp. of
-15 °C



Heating at a
temp. of
-15 °C



3D DC
Inverter



Error detection
and display



The protective
cover of the
valve



Intelligent
defrosting



Operation at
low voltage



Refrigerant
leak detection
sensor

COMFORT AND CONVENIENCE



Last mode
memory



Timer



Louver
position
memory



3 air flow
speeds



Automatic
operating
mode



Turbo

Model	ACP-12CH35AEXI+ R32
Capacity (W)	3517 (1114~4162)
Energy efficiency class	A++
Energy Efficiency SEER	6.5
Cooling operating range	-15 °C ≤ T ≤ 50 °C
Estimated load on cooling (W)	3500
Power input (W)	1320 (100~1600)
Capacity (W)	3810 (1084~4162)
Energy efficiency class	A+
Energy Efficiency SCOP	4.1
Heating operating range	-15 °C ≤ T ≤ 30 °C
Estimated load on heating (W)	2800
Power input (W)	1190 (167~1400)
Air flow (m³ / h) - HI / MID / LOW	530 / 430 / 310
Dehumidifying capacity (L / h)	1.2
Noise - Sound Pressure (dB (A)) - HI / MID / LOW / SI	40.5 / 34.5 / 25 / 21
Sound power level (dB)	≤ 54
Packaging dimensions (mm)	870 x 270 x 365
Product dimensions (mm)	805 x 194 x 285
Gross / net weight (kg)	9.5 / 7.3
Noise - Sound Pressure (dB (A))	≤ 55
Sound power level (dB)	≤ 64
Refrigerant	R32
Bracket distance (mm)	452
Packaging dimensions (mm)	835 x 300 x 540
Product dimensions (mm)	720 x 270 x 495
Gross / net weight (kg)	22.8 / 21.0
Liquid phase pipe diameter	1 / 4"
Gas phase pipe diameter	3 / 8"
Maximum pipe length (m)	25
Maximum height difference (m)	10
Pre-filled pipe length (m)	5
Gas refill (g / m)	12
Power interconnect cable (mm²)	5 x 1.5
Power Supply IU / OU 220-240 V / 1 / 50 Hz (mm²)	3 x 1.5

Cooling

Heating

Indoor unit

Outdoor unit

Connections

Power Supply

Self-cleaning

After switching off, the indoor unit rotates the fan in the opposite direction to remove condensed water and thus self-cleans, effectively preventing the growth of bacteria and viruses.



MORE PLEASANT COOLING AND HEATING

The built-in temperature sensor in the remote control detects the ambient temperature level and adjusts the room temperature more precisely to provide more comfortable cooling or heating, tailored to the user's needs.




A more pleasant sleep with a quiet operation

The quiet operation of the air conditioner, crucial for a more comfortable and invigorating sleep, is ensured by a low noise level of only 21 dB, which is equivalent to the volume of whispers or the sound of leaves.




Mono split commercial systems DC inverter

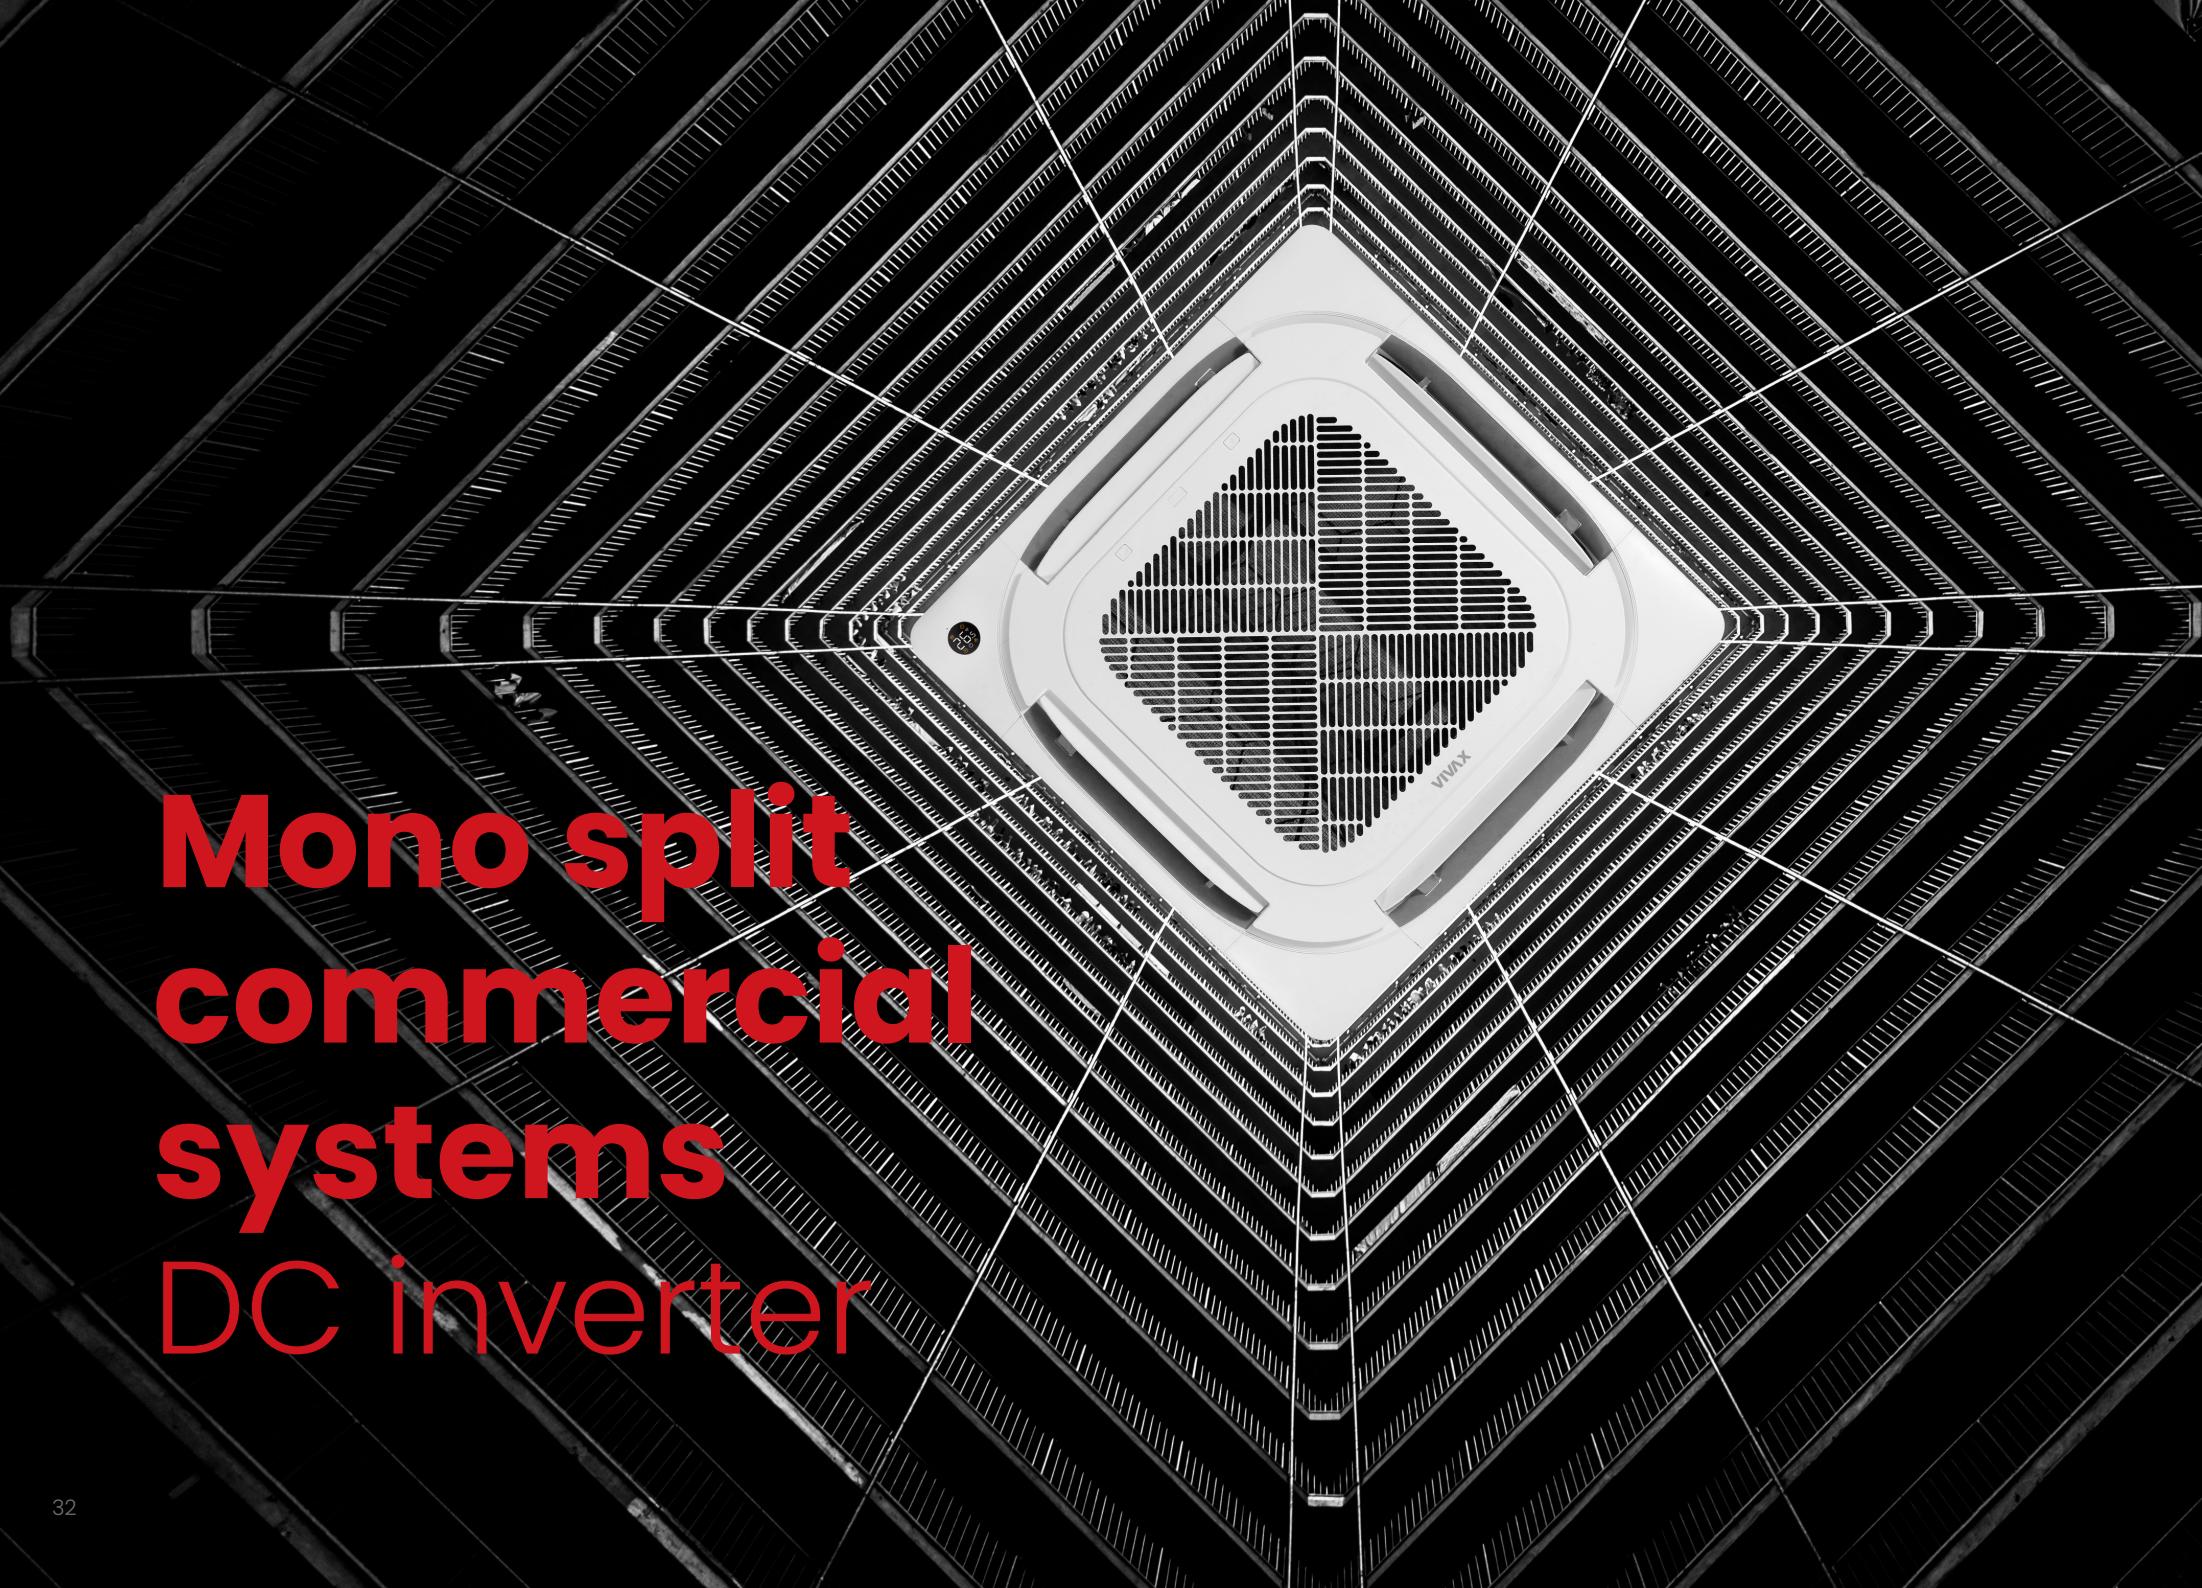

3D air flow

VIVAX air conditioning solutions combine vertical and horizontal automatic blowing for equally and comfortable air flow in the room. With 3D airflow, cold or heated air reaches every corner of the room, providing a high level of comfort. With cassette units from 7.0 kW and more, each louver can be operated separately.

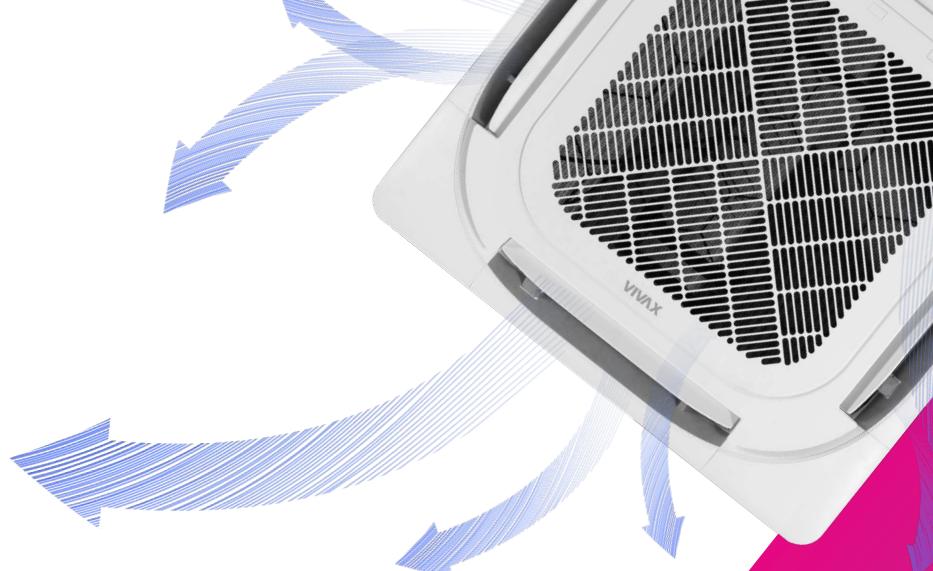

WIDE RANGE OF CAPACITY OF THE DEVICES

VIVAX has the right solution for both residential and commercial spaces, regardless of the size or shape of the space to be air-conditioned. VIVAX commercial air conditioners come with a wide range of nominal capacity of outdoor units from 3.52 kW to 18.17 kW, which allows a wide application of these devices.

Twin system – more combinations than before

Air conditioning units can be installed in a twin system with 2 indoor units of the same type and size connected to one outdoor unit, which is twice the size of the indoor unit. This feature helps to improve the air distribution inside the room.

In a twin system, one of the indoor units must be set up as the main unit and the other as the secondary unit. Only the main unit can be controlled, while the secondary takes over the main unit settings.



Floor split system

CT AERI

A++ Cooling SEER 7.3
A+ Heating SCOP 4.0



ENERGY SAVING



R32
gas



Night
mode



ECO
mode

HEALTH



Dust filter
Self-cleaning

RELIABILITY



Cooling at
a temp. of
-15 °C



Heating at
a temp. of
-20 °C



3D DC
Inverter



Error detection
and display



Refrigerant
leak detection
sensor



Emergency
function

COMFORT AND CONVENIENCE



Last mode
memory



Timer



Louver
position
memory



Multi
compatibility
3 air flow
speeds



Heating
at 8 °C



Automatic
operating
mode



Turbo



Digital
display

Model	ACP-12CT35AERI+ R32	ACP-18CT50AERI+ R32
Capacity (W)	3517 (762~4250)	4982 (2638~5568)
Energy efficiency class	A++	A++
Energy Efficiency SEER	7.3	6.7
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Estimated load on cooling (W)	3500	5000
Power input (W)	1000 (170~1350)	1500 (650~1950)
Capacity (W)	3810 (454~4690)	5275 (2198~6301)
Energy efficiency class	A+	A+
Energy Efficiency SCOP	4.0	4.0
Heating operating range	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
Estimated load on heating (W)	2600	4000
Power input (W)	980 (150~1300)	1420 (600~1900)
Air flow (m³ / h) - HI / MID / LOW	650 / 580 / 490	780 / 690 / 600
Dehumidifying capacity (L / h)	1.2	1.8
Noise - Sound Pressure (dB (A)) - HI / MID / LOW	37 / 34 / 27	41 / 38 / 32
Sound power level (dB)	≤ 54	≤ 55
Packaging dimensions (mm)	865 x 280 x 719	865 x 280 x 719
Product dimensions (mm)	794 x 200 x 621	794 x 200 x 621
Gross / net weight (kg)	18.8 / 14.9	18.8 / 14.9
Noise - Sound Pressure (dB (A))	≤ 54	≤ 55
Sound power level (dB)	≤ 62	≤ 63
Refrigerant	R32	R32
Bracket distance (mm)	452	511
Packaging dimensions (mm)	887 x 337 x 610	915 x 370 x 615
Product dimensions (mm)	765 x 303 x 555	805 x 330 x 554
Gross / net weight (kg)	29.0 / 26.6	35.2 / 32.5
Liquid phase pipe diameter	1 / 4"	1 / 4"
Gas phase pipe diameter	3 / 8"	1 / 2"
Maximum pipe length (m)	25	30
Maximum height difference (m)	10	20
Pre-filled pipe length (m)	5	5
Gas refill (g / m)	12	12
Outdoor unit power supply (mm²)	3 x 1.5	3 x 2.5
Indoor unit power supply (mm²)	3 x 1.5	3 x 1.5
Connection (mm²)	4 x 1.5	4 x 1.5
Power Supply	~220~240 V / 1 / 50 Hz; Indoor unit	



Double air exhaust

Floor split systems have air exhaust on two sides for even more efficient heating and cooling. Deflectors intelligently direct cold air up and hot air down, to set the perfect temperature quickly and efficiently without blowing air directly at the people in the room.



Floor-ceiling split system

CF AERI

A++ Cooling SEER 6.4
A+ Heating SCOP 4.1



ENERGY SAVING



R32
gas



Night
mode



ECO
mode

HEALTH



Dust filter



Self-cleaning

RELIABILITY



Cooling at
a temp. of
-15 °C



Heating at
a temp. of
-20 °C



3D DC
Inverter



Error detection
and display



Refrigerant
leak detection
sensor



Emergency
function



Last mode
memory



Timer



Louver
position
memory



Multi
compatibility



3 air flow
speeds



Heating
at 8 °C



Automatic
operating
mode



Turbo



Digital
display

COMFORT AND CONVENIENCE



1.0 W
Standby



Energy
saving
mode



Anti-corrosion
protection -
gold coating



The protective
cover of the
valve



Chasis
heating
belt



Compressor
heating
belt



Intelligent
defrosting



Operation at
low voltage



Wired control
device



Manual
control



Follow me
function



Silent
operation



Two-way
condensate
drain hose



Auto swing



Smart airflow



Soft start



Wi-Fi
ready

Model	ACP-18CF50AERI+ R32	ACP-24CF70AERI+ R32	ACP-36CF105AERI+ R32	ACP-48CF140AERI+ R32	ACP-55CF160AERI+ R32
Capacity (W)	5275 (2710~5861)	7033 (3220~7767)	10550 (2725~11782)	14057 (3520~15240)	15240 (4103~16119)
Energy efficiency class	A++	A++	A++	A++	A++
Energy Efficiency SEER	6.2	6.1	6.2	6.1	6.1
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Estimated load on cooling (W)	5400	7200	10500	14000	15300
Power input (W)	1450 (670~2027)	2300 (747~2930)	4000 (890~4300)	5000 (910~6200)	5900 (1100~6500)
Capacity (W)	5568 (2418~6301)	7620 (2720~8290)	11722 (2784~12777)	16120 (4100~17584)	18170 (4400~19342)
Energy efficiency class	A+	A+	A+	A+	A+
Energy Efficiency SCOP	4.0	4.0	4.1	4.0	4.0
Heating operating range	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
Estimated load on heating (W)	4000	5500	8600	11200	11800
Power input (W)	1500 (540~1640)	2050 (650~2850)	3350 (780~3950)	4800 (950~5950)	5950 (1120~6350)
Air flow (m³ / h) - HI / MID / LOW	958 / 839 / 723	1192 / 1023 / 853	1955 / 1728 / 1504	2100 / 1850 / 1600	2200 / 1950 / 1650
Dehumidifying capacity (L / h)	1.8	2.4	3.6	4.8	5.5
Noise - Sound Pressure (dB (A)) - HI / MID / LOW / SI	44 / 41 / 37 / 24	51 / 47 / 43 / 32	51 / 47.5 / 45 / 37	51 / 49 / 43 / 35	53 / 50 / 42 / 36
Sound power level (dB)	≤ 57	≤ 55	≤ 64	≤ 68	≤ 70
Packaging dimensions (mm)	1145 x 755 x 318	1145 x 755 x 318	1725 x 755 x 318	1725 x 755 x 318	1725 x 755 x 318
Product dimensions (mm)	1068 x 675 x 235	1068 x 675 x 235	1650 x 675 x 235	1650 x 675 x 235	1650 x 675 x 235
Gross / net weight (kg)	33.3 / 28.0	33.1 / 28.0	48.0 / 41.5	48.5 / 41.7	49.2 / 42.3
Noise - Sound Pressure (dB (A))	≤ 59	≤ 60	≤ 63	≤ 64	≤ 65
Sound power level (dB)	≤ 65	≤ 66	≤ 68	≤ 73	≤ 75
Refrigerant	R32	R32	R32	R32	R32
Bracket distance (mm)	511	663	673	634	634
Packaging dimensions (mm)	915 x 370 x 615	995 x 398 x 740	1090 x 500 x 885	1095 x 495 x 1480	1095 x 495 x 1480
Product dimensions (mm)	805 x 330 x 554	890 x 342 x 673	946 x 410 x 810	980 x 375 x 975	980 x 375 x 975
Gross / net weight (kg)	35.2 / 32.5	46.9 / 43.9	85.0 / 80.5	118.3 / 103.7	121.2 / 107.0
Liquid phase pipe diameter	1 / 4"	3 / 8"	3 / 8"	3 / 8"	3 / 8"
Gas phase pipe diameter	1 / 2"	5 / 8"	5 / 8"	5 / 8"	5 / 8"
Maximum pipe length (m)	30	50	75	75	75
Maximum height difference (m)	20	25	30	30	30
Pre-filled pipe length (m)	5	5	5	5	5
Gas refill (g / m)	12	24	24	24	24
Outdoor unit power supply (mm²)	3 x 2.5	3 x 2.5	5 x 2.5	5 x 2.5	5 x 2.5
Indoor unit power supply (mm²)	3 x 1.5	3 x 1.5	3 x 1.5	3 x 1.5	3 x 1.5
Connection (mm²)	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5
Power Supply	~220~240 V / 1 / 50 Hz; IU				
	~220~240 V / 1 / 50 Hz IU, ~380~415 V / 3 / 50 Hz OU				



LARGE AIR FLOW

The unit has the function of horizontal exhaust and automatic vertical exhaust, which ensures a more even and comfortable air flow.

POSSIBILITY OF FRESH AIR SUPPLY

Clean air from outside can be brought into the room through pipes, keeping the air in the room fresh and healthy.



360° EXHAUST

The 4-way ceiling exhaust allows 360 ° air flow. Each louver can be operated separately. When the air conditioner is restarted, the louvers return to the previously used position so that the usual preferred settings can be enjoyed.


NEW PANEL DESIGN

The new panel design and indoor unit fan ensure optimized aerodynamic performance and improved noise reduction to whisper volume levels.

Cassette split system

CC AERI

A++ Cooling SEER 6.6
A+ Heating SCOP 4.1

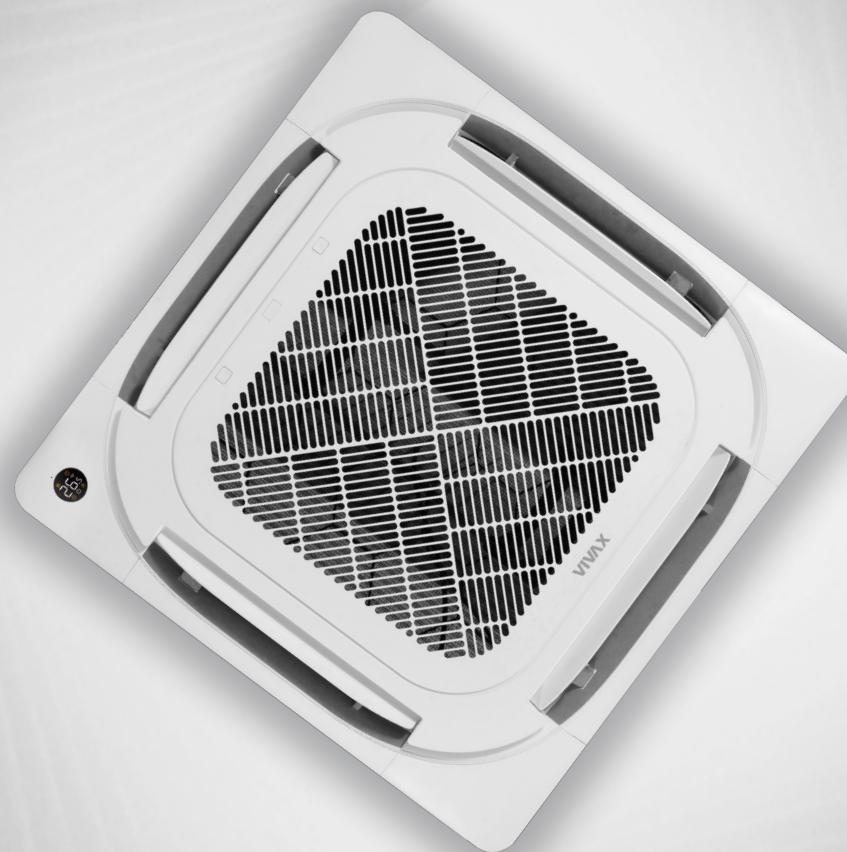

ENERGY SAVING



R32
gas



Night
mode



ECO
mode



Dust filter
Self-cleaning



Cooling at
a temp. of
-15 °C



Heating at
a temp. of
-20 °C



3D DC
Inverter



Error detection
and display



Refrigerant
leak detection
sensor



Emergency
function



Last mode
memory



Timer



Louver
position
memory



Multi
compatibility



3 air flow
speeds



Heating
at 8 °C



Automatic
operating
mode



Turbo



Digital
display



Condensate
drain pump



1.0 W
Standby



Energy
saving
mode



Anti-corrosion
protection -
gold coating



The protective
cover of the
valve



Chassis
heating
belt



Compressor
heating
belt



Intelligent
defrosting



Operation at
low voltage



Wired control
device



Manual
control



Follow me
function



Silent
operation



Two-way
condensate
drain hose



Auto swing



Strong
air flow



Soft start



Wi-Fi
ready




360°
air flow

Model	ACP-12CC35AERI+ R32	ACP-18CC50AERI+ R32	ACP-24CC70AERI+ R32	ACP-36CC105AERI+ R32	ACP-48CC140AERI+ R32	ACP-55CC160AERI+ R32
Cooling						
Capacity (W)	3520 (850~4162)	5275 (2901~5861)	7034 (3301~7913)	10551 (2696~11430)	14067 (3517~15826)	15240 (4103~16119)
Energy efficiency class	A++	A++	A++	A++	A++	A++
Energy Efficiency SEER	6.8	6.5	6.2	6.4	6.1	6.3
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Estimated load on cooling (w)	3500	5300	7000	10500	14000	15300
Power input (w)	1015 (160~1450)	1550 (720~2040)	2320 (780~2748)	4000 (890~4150)	4980 (810~6350)	5700 (1000~6250)
Heating						
Capacity (W)	3810 (470~4340)	5570 (2370~6100)	7620 (2810~8940)	11140 (2780~12660)	16120 (4100~17290)	18170 (4400~19930)
Energy efficiency class	A+	A+	A+	A+	A+	A+
Energy Efficiency SCOP	4.1	4.1	4.0	4.0	4.0	4.0
Heating operating range	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
Estimated load on heating (w)	2700	4200	6000	8200	11200	11800
Power input (w)	1020 (125~1390)	1560 (700~1950)	1900 (610~2700)	3000 (780~4000)	4580 (910~5900)	5700 (1020~6350)
Indoor unit						
Air flow (m³ / h) - HI / MID / LOW	620 / 520 / 330	660 / 540 / 300	1247 / 1118 / 992	1700 / 1590 / 1300	1900 / 1750 / 1600	2000 / 1850 / 1650
Dehumidifying capacity (L / h)	1.2	1.8	2.4	3.6	4.8	5.5
Noise - Sound Pressure (dB (A)) - HI / MID / LOW / SI	42 / 38.5 / 31.5 / 25,5	44 / 41 / 31.5 / 25	50 / 47.5 / 42 / 29	51 / 49 / 46 / 39	51.5 / 49 / 46.5 / 38.5	53 / 50.5 / 45.6 / 40
Sound power level (dB)	≤ 57	≤ 59	≤ 57	≤ 63	≤ 66	≤ 66
Product packaging dimensions (mm)	715 x 640 x 295	715 x 640 x 295	910 x 910 x 250	910 x 910 x 290	910 x 910 x 330	910 x 910 x 330
Panel packaging dimensions (mm)	715 x 700 x 115	715 x 700 x 115	1035 x 1035 x 90	1035 x 1035 x 90	1035 x 1035 x 90	1035 x 1035 x 90
Product dimensions (mm)	570 x 570 x 245	570 x 570 x 245	830 x 830 x 205	830 x 830 x 245	830 x 830 x 287	830 x 830 x 287
Panel dimension (mm)	620 x 620 x 50	620 x 620 x 50	950 x 950 x 55	950 x 950 x 55	950 x 950 x 55	950 x 950 x 55
Gross / net product weight (kg)	18.8 / 16.1	19.0 / 16.2	25.4 / 21.6	31.2 / 27.2	33.5 / 29.3	33.5 / 29.3
Gross / net panel weight (kg)	4.3 / 2.7	4.3 / 2.7	9.0 / 6.0	9.0 / 6.0	9.0 / 6.0	9.0 / 6.0
Outdoor unit						
Noise - Sound Pressure (dB (A))	≤ 57	≤ 58	≤ 60	≤ 63	≤ 64	≤ 65
Sound power level (dB)	≤ 62	≤ 65	≤ 67	≤ 70	≤ 73	≤ 75
Refrigerant	R32	R32	R32	R32	R32	R32
Bracket distance (mm)	452	511	663	673	634	634
Packaging dimensions (mm)	887 x 337 x 610	915 x 370 x 615	995 x 398 x 740	1090 x 500 x 885	1095 x 495 x 1480	1095 x 495 x 1480
Product dimensions (mm)	765 x 303 x 555	805 x 330 x 554	890 x 342 x 673	946 x 410 x 810	980 x 375 x 975	980 x 375 x 975
Gross / net weight uredaja (kg)	29.0 / 26.6	35.2 / 32.5	46.9 / 43.9	85.0 / 80.5	118.3 / 103.7	121.2 / 107.0
Connections						
Liquid phase pipe diameter	1 / 4"	1 / 4"	3 / 8"	3 / 8"	3 / 8"	3 / 8"
Gas phase pipe diameter	3 / 8"	1 / 2"	5 / 8"	5 / 8"	5 / 8"	5 / 8"
Maximum pipe length (m)	25	30	50	75	75	75
Maximum height difference (m)	10	20	25	30	30	30
Pre-filled pipe length (m)	5	5	5	5	5	5
Gas refill (g / m)	12	12	24	24	24	24
Interconnect cable						
Outdoor unit power supply (mm²)	3 x 1.5	3 x 2.5	3 x 2.5	5 x 2.5	5 x 2.5	5 x 2.5
Indoor unit power supply (mm²)	3 x 1.5	3 x 1.5	3 x 1.5	3 x 1.5	3 x 1.5	3 x 1.5
Connection (mm²)	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5
Power supply	~220-240 V / 1 / 50 Hz; Indoor and outdoor unit					
	~220-240 V / 1 / 50Hz IU, ~380-415 V / 3 / 50Hz OU					

STATIC PRESSURE

Maximum static pressure is 160 Pa.

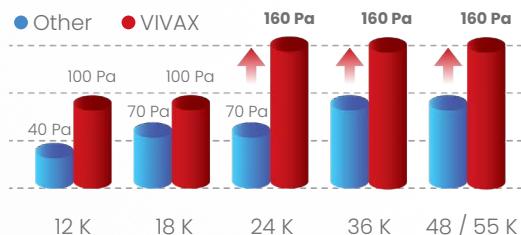


Duct split system

DT AERI

A++ Cooling SEER 6.6
A+ Heating SCOP 4.2

BUILT-IN CONDENSATE DRAIN PUMP

The drain pump raises condensate up to 1,000 mm.

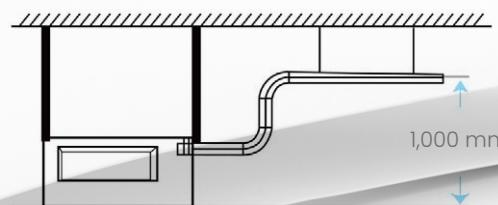

ENERGY SAVING



R32
gas



Night
mode



ECO
mode

HEALTH



Dust filter
Self-cleaning

RELIABILITY



Cooling at
a temp. of
-15 °C



Heating at
a temp. of
-20 °C



3D DC
Inverter



Error detection
and display
Refrigerant leak detection sensor



Emergency
function

COMFORT AND CONVENIENCE



Last mode
memory



Timer



Louver
position
memory



Multi
compatibility



3 air flow
speeds



Heating
at 8 °C



Auto



Turbo



Digital
display



Condensate
drain pump



1.0 W
Standby



Energy
saving
mode



Anti-corrosion
protection -
gold coating



The protective
cover of the
valve



Chassis
heating
belt



Compressor
heating
belt



Intelligent
defrosting



Operation at
low voltage



Wired control
device



Manual
control



Follow me
function



Silent
operation



Two-way
condensate
drain hose



Auto swing



Strong
air flow



Soft start



Wi-Fi
ready

Model	ACP-12DT35AERI+ R32	ACP-18DT50AERI+ R32	ACP-24DT70AERI+ R32	ACP-36DT105AERI+ R32	ACP-48DT140AERI+ R32	ACP-55DT160AERI+ R32
Capacity (W)	3517 (528~3908)	5275 (1319~6155)	7092 (3224~7913)	10550 (2726~11723)	14067 (3517~15826)	15240 (4103~17291)
Energy efficiency class	A++	A++	A++	A++	A++	A++
Energy Efficiency SEER	6.5	6.5	6.6	6.1	6.1	6.1
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Estimated load on cooling (W)	3500	5300	7100	10600	14000	15300
Power input (W)	1164 (155~1465)	1590 (360~2130)	2280 (750~2860)	3900 (890~4200)	4500 (810~6450)	5250 (1030~6650)
Capacity (W)	3810 (996~4467)	6008 (1495~6301)	7972 (2784~8558)	11723 (2784~12837)	16119 (4103~17584)	18170 (4396~20515)
Energy efficiency class	A+	A+	A+	A+	A+	A+
Energy Efficiency SCOP	4.1	4.1	4.2	4.0	4.0	4.0
Heating operating range	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
Estimated load on heating (W)	2700	4300	5600	8800	11500	12500
Power input (W)	1285 (302~1423)	1615 (500~1850)	2000 (640~2500)	3300 (780~4000)	4600 (950~5800)	5150 (950~6600)
Air flow (m³ / h) - HI / MID / LOW	660 / 570 / 470	900 / 780 / 650	1200 / 1000 / 700	1700 / 1400 / 1100	2000 / 1700 / 1300	2200 / 1900 / 1500
Dehumidifying capacity (L / h)	1.2	1.8	2.4	3.6	4.8	5.5
Noise - Sound Pressure (dB (A)) - HI / MID / LOW	35 / 33 / 31	36.5 / 34 / 31	33.5 / 32.5 / 31	40 / 37 / 34	43.5 / 41.5 / 39.5	44.5 / 43 / 41.5
Sound power level (dB)	≤ 52	≤ 53	≤ 56	≤ 62	≤ 65	≤ 66
Packaging dimensions (mm)	860 x 540 x 285	925 x 850 x 298	1225 x 860 x 304	1425 x 860 x 304	1425 x 860 x 304	1425 x 860 x 354
Product dimensions (mm)	700 x 450 x 200	700 x 750 x 245	1000 x 750 x 245	1200 x 750 x 245	1200 x 750 x 245	1200 x 750 x 300
Gross / net weight (kg)	19.8 / 16.6	29.0 / 24.4	37.2 / 31.8	44.4 / 38.4	46.8 / 40.4	49.1 / 42.9
Noise - Sound Pressure (dB (A))	≤ 55.5	≤ 59	≤ 60	≤ 65	≤ 64.5	≤ 64
Sound power level (dB)	≤ 62	≤ 62	≤ 69	≤ 70	≤ 73	≤ 74
Refrigerant	R32	R32	R32	R32	R32	R32
Bracket distance (mm)	452	511	663	673	634	634
Packaging dimensions (mm)	887 x 337 x 610	915 x 370 x 615	995 x 398 x 740	1090 x 500 x 885	1095 x 495 x 1480	1095 x 495 x 1480
Product dimensions (mm)	765 x 303 x 555	805 x 330 x 554	890 x 342 x 673	946 x 410 x 810	980 x 375 x 975	980 x 375 x 975
Gross / net weight (kg)	29.0 / 26.6	35.2 / 32.5	46.9 / 43.9	85.0 / 80.5	118.3 / 103.7	121.2 / 107.0
Liquid phase pipe diameter	1 / 4"	1 / 4"	3 / 8"	3 / 8"	3 / 8"	3 / 8"
Gas phase pipe diameter	3 / 8"	1 / 2"	5 / 8"	5 / 8"	5 / 8"	5 / 8"
Maximum pipe length (m)	25	30	50	75	75	75
Maximum height difference (m)	10	20	25	30	30	30
Pre-filled pipe length (m)	5	5	5	5	5	5
Gas refill (g / m)	12	12	24	24	24	24
Outdoor unit power supply (mm²)	3 x 2.5	3 x 2.5	3 x 2.5	5 x 2.5	5 x 2.5	5 x 2.5
Indoor unit power supply (mm²)	3 x 1.5	3 x 1.5	3 x 1.5	3 x 1.5	3 x 1.5	3 x 1.5
Connection (mm²)	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5
Power Supply	~220-240 V / 1 / 50 Hz; Indoor and outdoor unit					~220-240 V / 1 / 50 Hz IU, ~380-415 V / 3 / 50 Hz OU

Self-standing floor split system

FS AERI

A++ Cooling SEER 6.1
A+ Heating SCOP 4.0



ENERGY SAVING



R32
gas



Night
mode

HEALTH



Dust filter
Self-cleaning



Anti-corrosion
protection -
gold coating

RELIABILITY



Cooling at
a temp. of
-15 °C



Heating at
a temp. of
-15 °C



3D DC
Inverter



Error detection
and display



Refrigerant leak
detection
sensor



Emergency
function



The protective
cover of the
valve



Intelligent
defrosting



Operation at
low voltage

COMFORT AND CONVENIENCE



Last mode
memory



Timer



Louver position
memory



3 air flow
speeds



Automatic
operating
mode



Turbo



Digital display



Manual
control



Silent
operation



Two-way
condensate
drain hose



Auto swing



Strong
air flow



Soft start

Wide application

Self-standing floor air conditioners are designed for large spaces - lobbies of office buildings, restaurants, shops, conference or similar large spaces where it is not possible to use the surface of walls and ceilings to install air conditioning.



A PRACTICAL SOLUTION

They are easy to install and create a strong air flow that is directed by two rows of slats. DC - inverter compressor saves energy and makes temperature control more flexible and accurate.

Model	ACP-24FS70AERI+ R32	ACP-48FS140AERI+ R32	ACP-55FS160AERI+ R32
Capacity (W)	7033 (2345~7869)	14067 (3517~15679)	15240 (4103~16119)
Energy efficiency class	A++	A++	A++
Energy Efficiency SEER	6.3	6.1	5.8
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Estimated load on cooling (W)	7000	14100	15500
Power input (W)	2180 (700~2145)	5100 (1000~6200)	5600 (1020~7200)
Capacity (W)	7620 (3627~8602)	16119 (4103~17877)	19170 (4396~18757)
Energy efficiency class	A+	A+	A+
Energy Efficiency SCOP	4.1	4.0	4.0
Heating operating range	-15 °C ≤ T ≤ 24 °C	-15 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
Estimated load on heating (W)	5700	11100	11700
Power input (W)	2000 (1450~3150)	5100 (1000~6200)	4709 (1177~6094)
Air flow (m³ / h) - HI / MID / LOW	1050 / 800 / 670	2413 / 2222 / 2027	1950 / 1750 / 1600
Dehumidifying capacity (L / h)	2.4	4.8	5.5
Noise - Sound Pressure (dB (A)) - HI / MID / LOW	45 / 40 / 37	53 / 49 / 47	53 / 50.5 / 45.5
Sound power level (dB)	≤ 56	≤ 67	≤ 64
Packaging dimensions (mm)	2000 x 510 x 490	2050 x 750 x 575	2080 x 755 x 585
Product dimensions (mm)	405 x 405 x 1775	1935 x 629 x 456	600 x 455 x 1934
Gross / net weight (kg)	38.3 / 29.1	59.0 / 77.0	80.0 / 61.4
Noise - Sound Pressure (dB (A))	≤ 59.5	≤ 63	≤ 65
Sound power level (dB)	≤ 70	≤ 73	≤ 73
Refrigerant	R32	R32	R32
Bracket distance (mm)	663	634	634
Packaging dimensions (mm)	995 x 398 x 740	1095 x 495 x 1480	1145 x 500 x 1080
Product dimensions (mm)	890 x 342 x 673	952 x 415 x 1333	980 x 376 x 375
Gross / net weight (kg)	46.8 / 43.8	118.3 / 103.7	107.0 / 92.0
Liquid phase pipe diameter	1/4"	3/8"	3/8"
Gas phase pipe diameter	1/2"	5/8"	5/8"
Maximum pipe length (m)	50	65	65
Maximum height difference (m)	25	30	30
Pre-filled pipe length (m)	5	5	5
Gas refill (g / m)	24	24	24
Outdoor unit power supply (mm²)	3 x 2.5	5 x 2.5	5 x 2.5
Connection (mm²)	4 x 1.5	4 x 1.5	4 x 1.5
Power Supply	~220~240 V / 1 / 50 Hz	~380~415 V / 3 / 50 Hz	~380~415 V / 3 / 50 Hz

Multi-split systems

DC Inverter





Wide range of options

The wide range of outdoor units and the possibility of connecting 2 to 5 indoor units enable the wide application of these air conditioners with special emphasis on commercial and residential spaces. Indoor units come in 5 different versions: wall, cassette, floor, floor-ceiling and duct. It is possible to choose between 21 different indoor units with a capacity range from 2.22 kW to 7.03 kW.

NEW TECHNOLOGICAL SOLUTIONS OF HIGH ENERGY EFFICIENCY

VIVAX air conditioners are the ideal solution for air conditioning of business or residential space – they are designed to meet the requirements of both the user and the space to be air-conditioned. Durability of the device, reasonable price and A++ class of energy efficiency are the best choice that ranks VIVAX multi split DC inverters among the leading air conditioners in this segment of air conditioning.

Flexible positioning of the outdoor unit

The maximum length of the installation is 80 m high, which allows very easy positioning of the device in relation to the external dimensions of the building. The outdoor unit can easily be placed on the roof of the building or the courtyard side of the building to keep the outdoor appearance intact.



Wall indoor units

AEHI | AERI | AENI



Ionizer



Anti-corrosion protection -
gold coating



Biofilter



Heating at a
temp. of
-20 °C



Wi-Fi
ready



Heating
at 8 °C



Ionizer



Self-cleaning



Heating at a
temp. of
-20 °C



Heating
at 8 °C



Wi-Fi
ready



Smart
airflow



Biofilter



Anti-corrosion
protection -
gold coating



Heating at a
temp. of
-20 °C



Follow me
function



Automatic
operating
mode



Wi-Fi
ready

Model	ACP-07CH21AENI/I	ACP-09CH25AERI/I+	ACP-12CH35AERI/I+	ACP-18CH50AERI/I+	ACP-09CH25AEHI/I+	ACP-12CH35AEHI/I+	ACP-18CH50AEHI/I+
Capacity (W)	2052	2638	3517	5275	2638	3517	5275
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Capacity (W)	2346	2931	3810	5568	2931	3810	5568
Heating operating range	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
Air flow (m³ / h) - HI / MID / LOW	430 / 330 / 280	483 / 362 / 303	584 / 477 / 395	730 / 500 / 420	700 / 515 / 425	700 / 515 / 425	750 / 530 / 430
Refrigerant	R32	R32	R32	R32	R32	R32	R32
Dehumidifying capacity (L / h)	1.0	1.0	1.2	1.8	1.0	1.2	1.8
Noise - Sound Pressure (dB (A)) - HI / MID / LOW / SI	37 / 32 / 24 / 21	36.5 / 29 / 24 / 20	39.5 / 33 / 25 / 21	43 / 33.5 / 28 / 23	40 / 32.5 / 21.5	40 / 32.5 / 21.5 / 19	41.5 / 36.5 / 33.5 / 19
Sound power level (dB)	≤ 54	≤ 55	≤ 55	≤ 57	≤ 53	≤ 53	≤ 54
Packaging dimensions (mm)	790 x 270 x 375	875 x 285 x 380	875 x 285 x 380	1045 x 305 x 410	1005 x 295 x 385	1005 x 295 x 385	1005 x 295 x 385
Product dimensions (mm)	726 x 210 x 291	802 x 189 x 297	802 x 189 x 297	965 x 215 x 319	920 x 211 x 321	920 x 211 x 321	920 x 211 x 321
Gross / net weight (kg)	9.4 / 7.0	11.1 / 8.6	11.1 / 8.6	14.2 / 10.9	14.2 / 11.3	14.2 / 11.3	14.4 / 11.5
Liquid phase pipe diameter	1 / 4"	1 / 4"	1 / 4"	1 / 4"	1 / 4"	1 / 4"	1 / 4"
Gas phase pipe diameter	3 / 8"	3 / 8"	3 / 8"	1 / 2"	3 / 8"	3 / 8"	1 / 2"
Connection (mm²)	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5
Power Supply	~220–240 V / 1 / 50 Hz; Outdoor unit						

Floor indoor units

CT AERI



- R32 gas
- Night mode
- 1.0 W Standby
- Dust filter
- Self-cleaning

- 3D DC Inverter
- Error detection and display
- Heating at a temp. of -20 °C
- Cooling at a temp. of -15 °C

- Follow me function
- Last mode memory
- Timer
- Louver Position Memory
- Wi-Fi ready



CF AERI

- R32 gas
- Night mode
- 1.0 W Standby
- Dust filter
- Self-cleaning

- 3D DC Inverter
- Error detection and display
- Heating at a temp. of -20 °C
- Cooling at a temp. of -15 °C

- Follow me function
- Last mode memory
- Timer
- Louver Position Memory
- Condensate drain pump
- Wired control device
- Wi-Fi ready

	Model	ACP-09CT25AERI/I3s	ACP-12CT35AERI/I3s	ACP-18CT50AERI/I3s	Model	ACP-18CF50AERI/I3
Indoor unit	Capacity (W)	2638	3517	4982	Capacity (W)	5280
	Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	Cooling operating range	-15 °C ≤ T ≤ 50 °C
	Capacity (W)	2931	3810	5275	Capacity (W)	5570
	Heating operating range	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	Heating operating range	-20 °C ≤ T ≤ 24 °C
	Air flow (m³ / h) - HI / MID / LOW	650 / 580 / 490	650 / 580 / 490	780 / 690 / 600	Air flow (m³ / h) - HI / MID / LOW	958 / 839 / 723
	Refrigerant	R32	R32	R32	Refrigerant	R32
	Dehumidifying capacity (L / h)	1.0	1.2	1.8	Dehumidifying capacity (L / h)	1.8
	Noise - Sound Pressure (dB (A)) - HI / MID / LOW	37 / 34 / 27	37 / 34 / 27	41 / 38 / 32	Noise - Sound Pressure (dB (A)) - HI / MID / LOW / SI	43.5 / 41 / 36.5 / 24
	Sound power level (dB)	≤ 54	≤ 54	≤ 55	Sound power level (dB)	≤ 57
	Packaging dimensions (mm)	903 x 731 x 295	903 x 731 x 295	903 x 731 x 295	Packaging dimensions (mm)	1145 x 755 x 318
Connections	Product dimensions (mm)	793 x 621 x 200	793 x 621 x 200	793 x 621 x 200	Product dimensions (mm)	1068 x 675 x 235
	Gross / net weight (kg)	18.8 / 14.9	18.8 / 14.9	18.8 / 14.9	Gross / net weight (kg)	33.3 / 28.0
	Liquid phase pipe diameter	1 / 4"	1 / 4"	1 / 4"	Liquid phase pipe diameter	1 / 4"
	Gas phase pipe diameter	3 / 8"	3 / 8"	1 / 2"	Gas phase pipe diameter	1 / 2"
Interconnect cable	Connection (mm²)	4 x 1.5	4 x 1.5	4 x 1.5	Connection (mm²)	4 x 1.5
	Power Supply	~220-240 V / 1 / 50 Hz; Outdoor unit				~220-240 V / 1 / 50 Hz; Outdoor unit



Cassette indoor units

CC AERI

Model	ACP-09CC25AERI/I3s	ACP-12CC35AERI/I3s	ACP-18CC50AERI/I3s
Capacity (W)	2638	3517	5280
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Capacity (W)	2931	3810	6568
Heating operating range	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
Air flow (m³ / h) - HI / MID / LOW	500 / 460 / 400	620 / 520 / 330	660 / 540 / 300
Refrigerant	R32	R32	R32
Dehumidifying capacity (L / h)	1.0	1.2	1.8
Noise - Sound Pressure (dB (A)) - HI / MID / LOW	39 / 37 / 35	42 / 38.5 / 31.5	44 / 41 / 31.5
Sound power level (dB)	≤ 55	≤ 55	≤ 56
Product packaging dimensions (mm)	715 x 640 x 295	715 x 640 x 295	715 x 640 x 295
Panel packaging dimensions (mm)	715 x 715 x 125	715 x 700 x 115	715 x 700 x 115
Product dimensions (mm)	570 x 570 x 245	570 x 570 x 245	570 x 570 x 245
Panel dimension (mm)	620 x 620 x 50	620 x 620 x 50	620 x 620 x 50
Gross / net panel weight (kg)	4.5 / 2.5	4.3 / 2.7	4.3 / 2.7
Gross / net product weight (kg)	17.5 / 14.6	18.8 / 16.1	19.0 / 16.2
Liquid phase pipe diameter	1 / 4"	1 / 4"	1 / 4"
Gas phase pipe diameter	3 / 8"	3 / 8"	1 / 2"
Connection (mm²)	4 x 1.5	4 x 1.5	4 x 1.5
Power Supply	~220-240 V / 1 / 50 Hz; Outdoor unit		

Indoor unit

Connections

Interconnect cable



Duct indoor units

DT AERI



Model	ACP-12DT35AERI/i3s	ACP-18DT50AERI/i3s
Capacity (W)	3517	5280
Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
Capacity (W)	3810	5568
Heating operating range	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
Air flow (m³ / h) - HI / MID / LOW	600 / 570 / 470	900 / 780 / 650
Refrigerant	R32	R32
Dehumidifying capacity (L / h)	1.2	1.8
Noise - Sound Pressure (dB (A)) - HI / MID / LOW	35 / 33 / 31	36.5 / 34 / 31
Sound power level (dB)	≤ 52	≤ 53
Packaging dimensions (mm)	860 x 540 x 285	925 x 850 x 298
Product dimensions (mm)	700 x 506 x 200	700 x 750 x 245
Gross / net weight (kg)	19.8 / 16.6	29.0 / 24.4
Connections	1 / 4"	1 / 4"
Gas phase pipe diameter	3 / 8"	1 / 2"
Connection (mm²)	4 x 1.5	4 x 1.5
Power Supply	~220-240 V / 1 / 50 Hz; Outdoor unit	

Indoor unit


Connections

Interconnect cable



PRIMEGUARD COATING FOR LONG-LASTING PERFORMANCE

The unique anti-corrosion gold coating on the heat exchanger can withstand salt air, rain and other corrosive elements. It also effectively prevents the growth of bacteria and improves heating efficiency.

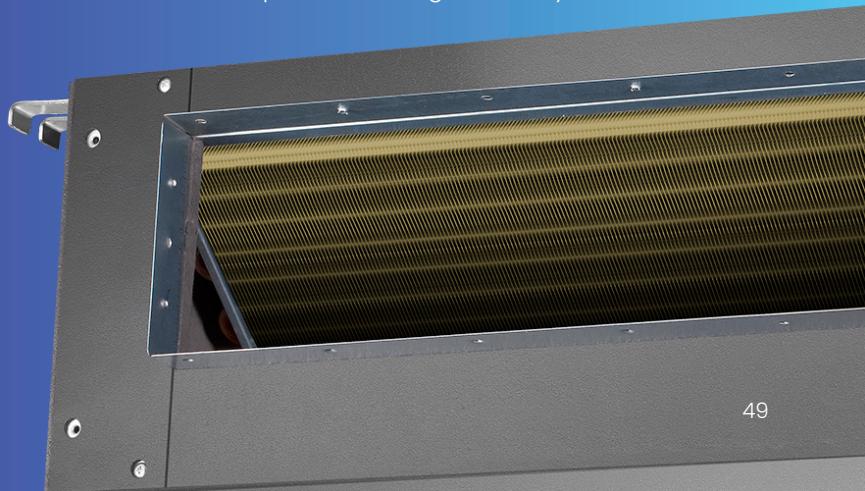

Outdoor units

COFM AERI

A++ Cooling SEER 6.9
A+ Heating SCOP 4.0



R32
gas



3D DC
Inverter



Heating at
a temp. of
-20 °C



Cooling at
a temp. of
-15 °C



The protective
cover of the
valve



Error
detection and
display



Chassis
heating
belt



Compressor
heating
belt



Last mode
memory



Flexible installation

The maximum length of the cooling pipes can be up to 80 m. The maximum difference in height between the indoor and outdoor unit can be up to 30 m.

Model	ACP-14COFM40AERIs R32	ACP-18COFM50AERIs R32	ACP-21COFM60AERIs R32	ACP-27COFM79AERIs R32	ACP-28COFM82AERI R32	ACP-36COFM105AERI R32	ACP-42COFM123AERIs R32
Cooling	Capacity (W)	4103 (1611~4982)	5275 (2286~5715)	6155 (2491~7034)	7913 (3077~8909)	8206 (3077~11137)	10550 (3077~11195)
	Energy efficiency class	A++	A++	A++	A++	A++	A++
	Energy Efficiency SEER	6.9	6.9	6.9	6.7	6.9	6.9
	Cooling operating range	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C			
	Estimated load on cooling (W)	4100	5300	6100	7900	8200	10500
	Power input (W)	1270 (100~1670)	1635 (160~2000)	1900 (180~2200)	2450 (210~2960)	2540 (210~3450)	3233 (230~4285)
	Capacity (W)	4396 (1612~4982)	5570 (2403~5744)	6154 (1614~6593)	8206 (2110~8471)	8206 (2345~8528)	10550 (3278~11943)
Heating	Energy efficiency class	A+	A+	A+	A+	A+	A+
	Energy Efficiency SCOP	4.0	4.0	4.0	4.0	4.0	4.0
	Heating operating range	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C			
	Estimated load on heating	3.8	4.5	5.1	5.7	5.9	8.2
	Power input (W)	1185 (240~1525)	1500 (270~1750)	1660 (250~1750)	2210 (410~2330)	2210 (450~2708)	2880 (603~4483)
	Refrigerant	R32	R32	R32	R32	R32	R32
	Maximum number of indoor units	2	2	3	3	4	4
Outdoor unit	Noise - Sound Pressure (dB (A))	≤ 54	≤ 54	≤ 56	≤ 56	≤ 58	≤ 59
	Sound power level (dB)	≤ 64	≤ 65	≤ 70	≤ 70	≤ 70	≤ 70
	Bracket distance (mm)	514	514	663	663	673	673
	Packaging dimensions (mm)	915 x 370 x 615	915 x 370 x 615	1030 x 438 x 750	1030 x 438 x 750	1090 x 500 x 885	1090 x 500 x 885
	Product dimensions (mm)	805 x 330 x 554	805 x 330 x 554	890 x 342 x 673	890 x 342 x 673	946 x 410 x 810	946 x 410 x 810
	Gross / net weight (kg)	34.7 / 31.6	38.0 / 35.0	47.1 / 43.3	51.8 / 48.0	67.7 / 62.1	75.6 / 68.8
	Liquid phase pipe diameter	1 / 4"	1 / 4"	1 / 4"	1 / 4"	4" x 1 / 4"	5" x 1 / 4"
Connections	Gas phase pipe diameter	3 / 8"	3 / 8"	3 / 8"	3 / 8"	3 x 3 / 8" + 1 x 1 / 2"	3 x 3 / 8" + 1 x 1 / 2"
	Maximum pipe length (m)	40	40	60	60	80	80
	Maximum height difference (m) (OU above IU / OU below IU)	15 / 10	15 / 10	15 / 10	15 / 10	15 / 10	15 / 10
	Pre-filled pipe length (m)	15	15	22.5	22.5	30	30
	Gas refill (For Liquid phase pipe diameter 1/4")	12 g / m	12 g / m	12 g / m			
	Connection (mm ²)	3 x 2.5	3 x 2.5	3 x 2.5	3 x 2.5	3 x 2.5	3 x 2.5
	Power Supply				~220~240 V / 1 / 50 Hz; Outdoor unit		
Interconnect cable							

Multi-split combinations

ACP-14COFM40AERI R32

2 in. un.

Cooling (kW)					
Unit	A	B	C	D	Total
7+7	2,05	2,05	—	—	4,10 (1,77-5,30)
7+9	1,81	2,33	—	—	4,15 (1,19-5,38)
7+12	1,64	2,64	—	—	4,17 (1,17-5,52)
9+9	2,06	2,06	—	—	4,13 (1,20-5,46)
9+12	1,78	2,37	—	—	4,15 (1,17-5,57)

Heating (kW)					
Unit	A	B	C	D	Total
7+7	2,05	2,05	—	—	4,27 (1,67-5,03)
7+9	1,93	2,48	—	—	4,41 (1,66-4,99)
7+12	1,65	2,83	—	—	4,48 (1,67-5,07)
9+9	2,21	2,21	—	—	4,43 (1,65-4,95)
9+12	1,91	2,55	—	—	4,46 (1,66-5,04)

ACP-18COFM50AERI R32

2 indoor un.

Cooling (kW)					
Unit	A	B	C	D	Total
7+7	2,05	2,05	—	—	4,15 (1,33-5,64)
7+9	2,05	2,64	—	—	4,65 (1,34-5,72)
7+12	1,94	3,32	—	—	5,26 (1,32-5,89)
9+9	2,64	2,64	—	—	5,58 (1,70-5,34)
9+12	2,25	3,00	—	—	5,24 (1,34-5,96)
12+12	2,64	2,64	—	—	5,27 (1,31-6,08)

Heating (kW)					
Unit	A	B	C	D	Total
7+7	2,05	2,05	—	—	4,43 (1,72-5,42)
7+9	2,05	2,64	—	—	4,80 (1,71-5,38)
7+12	2,10	3,61	—	—	5,71 (1,72-5,45)
9+9	2,64	2,64	—	—	5,58 (1,70-5,34)
9+12	2,25	3,00	—	—	5,68 (1,71-5,42)
12+12	2,87	2,87	—	—	5,74 (1,71-5,48)

ACP-21COFM60AERI R32

2 indoor units

Cooling (kW)					
Unit	A	B	C	D	Total
7+7	2,05	2,05	—	—	4,17 (2,45-6,10)
7+9	2,05	2,64	—	—	4,65 (2,49-6,20)
7+12	2,05	3,52	—	—	5,56 (2,43-6,40)
7+18	1,73	4,44	—	—	6,17 (2,62-6,81)
9+9	2,64	2,64	—	—	5,26 (2,53-6,30)
9+12	2,24	3,52	—	—	6,12 (2,46-6,48)
9+18	2,05	4,10	—	—	6,15 (2,65-6,86)
12+12	3,10	3,10	—	—	6,19 (2,41-6,63)

Heating (kW)					
Unit	A	B	C	D	Total
7+7	2,05	2,05	—	—	4,28 (2,51-6,97)
7+9	2,05	2,64	—	—	4,81 (2,50-6,93)
7+12	2,05	3,52	—	—	5,78 (2,51-7,05)
7+18	1,84	4,72	—	—	6,56 (2,56-7,20)
9+9	2,64	2,64	—	—	5,50 (2,49-6,88)
9+12	2,24	3,52	—	—	6,39 (2,50-7,01)
9+18	2,18	4,38	—	—	6,53 (2,55-7,17)
12+12	3,23	3,23	—	—	6,46 (2,51-7,09)

3 indoor un.

Unit	A	B	C	D	Total
7+7+7	2,05	2,05	2,05	—	6,10 (2,67-6,75)
7+7+9	1,87	1,87	2,40	—	6,14 (2,70-6,79)
7+7+12	1,68	1,68	2,87	—	6,23 (2,85-6,89)
7+9+9	1,73	2,23	2,23	—	6,18 (2,72-6,84)
9+9+9	2,05	2,05	2,05	—	6,16 (2,75-6,89)
9+9+12	1,87	1,87	2,50	—	6,24 (2,70-6,98)

Unit	A	B	C	D	Total
7+7+7	2,05	2,05	2,05	—	6,41 (2,57-7,30)
7+7+9	1,94	1,94	2,50	—	6,38 (2,57-7,27)
7+7+12	1,73	1,73	2,97	—	6,42 (2,57-7,32)
7+9+9	1,78	2,29	2,29	—	6,38 (2,56-7,24)
9+9+9	2,11	2,11	2,11	—	6,33 (2,55-7,21)
9+9+12	1,91	1,91	2,55	—	6,38 (2,56-7,27)

ACP-27COFM79AERI R32

Cooling (kW)

Unit	A	B	C	D	Total
7+7	2,05	2,05	—	—	4,18 (3,13-7,63)
7+9	2,05	2,64	—	—	4,71 (3,17-7,79)
7+12	2,05	3,52	—	—	5,56 (3,12-8,13)
7+18	2,05	5,28	—	—	7,33 (3,31-8,87)
9+9	2,64	2,64	—	—	5,26 (3,20-7,94)
9+12	2,64	3,52	—	—	6,19 (3,16-8,26)

Heating (kW)

Unit	A	B	C	D	Total
7+7	2,05	2,05	—	—	4,44 (2,99-8,42)
7+9	2,05	2,64	—	—	4,95 (2,98-8,34)
7+12	2,05	3,52	—	—	5,87 (2,98-8,50)
7+18	2,05	5,28	—	—	7,51 (3,05-8,71)
9+9	2,64	2,64	—	—	5,51 (2,96-8,25)
9+12	2,64	3,52	—	—	6,48 (2,97-8,46)

ACP-18COFM50AERI R32

Unit	A	B	C	D	Total
7+7+7	2,05	2,05	2,05	—	6,08 (3,39-8,78)
7+7+9	2,05	2,05	2,64	—	6,74 (3,43-8,87)
7+7+12	2,05	2,05	3,52	—	7,64 (3,36-9,07)
7+7+18	1,73	1,73	4,44	—	7,90 (3,54-9,46)
7+9+9	2,05	2,64	2,64	—	7,26 (3,47-8,97)
7+9+12	1,98	2,54	3,39	—	7,91 (3,40-9,16)
7+9+18	1,64	2,10	4,21	—	7,94 (3,58-9,52)
7+12+12	1,79	3,06	3,06	—	7,92 (3,33-9,33)
9+9+9	2,64	2,64	2,64	—	7,85 (3,51-9,05)
9+9+12	2,36	2,36	3,14	—	7,86 (3,44-9,24)
9+12+12	2,14	2,85	2,85	—	7,85 (3,38-9,39)
12+12+12	2,65	2,65	2,65	—	7,95 (3,30-9,52)

Unit	A	B	C	D	Total
7+7+7	2,05	2,05	2,05	—	6,48 (3,13-9,76)
7+7+9	2,05	2,05	2,64	—	6,92 (3,12-9,67)
7+7+12	2,05	2,05	3,52	—	7,89 (3,13-9,80)
7+7+18	1,73	1,73	4,44	—	8,25 (3,16-9,97)
7+9+9	2,05	2,64	2,64	—	7,55 (3,12-9,63)
7+9+12	1,98	2,54	3,39	—	8,20 (3,12-9,76)
7+9+18	1,64	2,10	4,21	—	8,22 (3,16-9,94)
7+12+12	1,79	3,06	3,06	—	8,27 (3,12-9,85)
9+9+9	2,64	2,64	2,64	—	8,28 (3,11-9,58)
9+9+12	2,36	2,36	3,14	—	8,27 (3,11-9,71)
9+12+12	2,14	2,85	2,85	—	8,24 (3,12-9,82)
12+12+12	2,65	2,65	2,65	—	8,24 (3,12-9,90)

ACP-21COFM60AERI R32

Unit	A	B	C	D	Total
7+7+7	2,05	2,05	2,05	—	6,10 (3,40-9,80)
7+7+9	2,05	2,05	2,64	—	6,74 (3,44-9,91)
7+7+12	2,05	2,05	3,52	—	7,63 (3,37-10,15)
7+7+18	1,77	1,77	4,56	—	8,11 (3,56-10,62)
7+9+9	2,05	2,64	2,64	—	7,24 (3,48-10,01)
7+9+12	2,05	2,64	3,52	—	7,24 (3,41-10,25)
7+9+18	1,68	2,16	4,32	—	8,15 (3,59-10,70)
7+12+12	1,83	3,14	3,14	—	8,12 (3,34-10,46)
7+12+18	1,54	2,64	3,95	—	8,13 (3,53-10,88)
7+9+9+9	2,64	2,64	2,64	—	8,28 (3,09-9,48)
7+9+9+12	2,38	2,38	3,18	—	8,45 (3,10-9,74)
7+9+9+18	2,02	2,02	4,04	—	8,09 (3,62-10,78)
9+12+12	2,20	2,93	2,93	—	8,06 (3,38-10,55)
12+12+12</td					

ACP-36COFM105AERI R32

Cooling (kW)						
Unit	A	B	C	D	Total	
7+12	2,05	3,52	—	—	5,63 (3,27-10,41)	
7+18	2,05	5,28	—	—	7,35 (3,47-11,58)	
9+9	2,64	2,64	—	—	5,27 (3,36-10,06)	
9+12	2,64	3,52	—	—	6,27 (3,31-10,62)	
9+18	2,64	5,28	—	—	8,25 (4,17-12,85)	
12+12	3,52	3,52	—	—	7,13 (3,26-11,10)	
12+18	3,52	5,28	—	—	8,94 (3,46-12,05)	

Heating (kW)						
Unit	A	B	C	D	Total	
7+12	2,05	3,52	—	—	5,59 (4,06-12,37)	
7+18	2,05	5,28	—	—	7,59 (4,19-12,95)	
9+9	2,64	2,64	—	—	5,54 (4,01-11,80)	
9+12	2,64	3,52	—	—	6,56 (4,03-12,21)	
9+18	2,64	5,28	—	—	8,25 (4,17-12,85)	
12+12	3,52	3,52	—	—	7,42 (4,06-12,62)	
12+18	3,52	5,28	—	—	9,21 (4,19-13,09)	

3 indoor units						
Unit	A	B	C	D	Total	
7+7+7	2,05	2,05	2,05	—	6,20 (3,54-11,53)	
7+7+9	2,05	2,05	2,64	—	6,73 (3,58-11,69)	
7+7+12	2,05	2,05	3,52	—	7,61 (3,51-11,98)	
7+7+18	2,05	2,05	5,28	—	9,35 (3,71-12,63)	
7+9+9	2,05	2,64	—	—	7,25 (3,63-11,84)	
7+9+12	2,05	2,64	3,52	—	8,26 (3,56-12,12)	
7+9+18	2,05	2,64	5,28	—	8,47 (4,23-13,01)	
7+12+12	2,05	3,52	3,52	—	9,09 (3,48-12,43)	
7+12+18	2,05	3,52	5,28	—	9,42 (4,24-13,22)	
7+21+8	2,01	3,44	5,16	—	10,61 (3,69-13,00)	
9+9+9	2,64	2,64	—	—	7,90 (3,67-11,93)	
9+9+12	2,64	2,64	3,52	—	8,15 (4,20-12,63)	
9+9+18	2,64	2,64	5,28	—	10,53 (3,78-12,86)	
9+12+12	2,64	3,52	3,52	—	10,06 (4,22-13,14)	
9+12+18	2,64	3,52	5,28	—	10,89 (4,29-13,28)	
12+12+12	2,64	3,52	3,52	—	10,65 (3,72-13,10)	
12+12+18	2,64	3,52	5,28	—	10,90 (4,23-13,33)	
12+18+18	3,05	3,05	4,57	—	10,67 (3,66-13,32)	

Heating (kW)						
Unit	A	B	C	D	Total	
7+12	2,05	3,52	—	—	5,63 (3,27-10,41)	
7+18	2,05	5,28	—	—	7,59 (4,19-12,95)	
9+9	2,64	2,64	—	—	5,54 (4,01-11,80)	
9+12	2,64	3,52	—	—	6,56 (4,03-12,21)	
9+18	2,64	5,28	—	—	8,25 (4,17-12,85)	
12+12	3,52	3,52	—	—	7,42 (4,06-12,62)	
12+18	3,52	5,28	—	—	9,21 (4,19-13,09)	



ACP-42COFM123AERI R32

Cooling (kW)						
Unit	A	B	C	D	E	Total
7+18	2,05	5,28	—	—	—	7,42 (3,50-11,72)
9+12	2,64	3,52	—	—	—	6,15 (3,34-10,74)
9+18	2,64	5,28	—	—	—	8,07 (3,54-11,89)
12+12	3,52	3,52	—	—	—	7,18 (3,28-11,23)
12+18	3,52	5,28	—	—	—	8,92 (3,49-12,25)

2 In-unit						
Unit	A	B	C	D	E	Total
7+7+7	2,05	2,05	2,05	—	—	6,05 (3,56-11,66)
7+7+9	2,05	2,05	2,64	—	—	6,78 (3,61-11,82)
7+7+12	2,05	2,05	3,52	—	—	7,53 (3,53-12,18)
7+7+18	2,05	2,05	5,28	—	—	9,47 (3,74-12,80)
7+9+9	2,05	2,64	2,64	—	—	7,32 (3,65-11,98)
7+9+12	2,05	2,64	3,52	—	—	8,21 (3,58-12,32)
7+9+18	2,05	2,64	5,28	—	—	10,08 (3,78-12,92)
7+12+12	2,05	3,52	3,52	—	—	9,06 (3,51-12,63)
7+12+18	2,05	3,52	5,28	—	—	10,67 (3,71-13,17)
9+9+9	2,64	2,64	2,64	—	—	7,84 (3,70-12,13)
9+9+12	2,64	2,64	3,52	—	—	8,85 (3,63-12,46)
9+9+18	2,64	2,64	5,28	—	—	10,53 (3,81-13,03)
9+12+12	2,64	3,52	3,52	—	—	9,68 (3,55-12,71)
9+12+18	2,64	3,52	5,28	—	—	11,45 (3,75-13,27)
12+12+12	3,52	3,52	3,52	—	—	10,60 (3,50-12,98)
12+12+18	3,52	3,52	5,28	—	—	12,13 (3,69-13,49)

3 indoor units						
Unit	A	B	C	D	Total	
7+7+7+7	2,05	2,05	2,05	2,05	—	8,10 (3,81-12,87)
7+7+7+9	2,05	2,05	2,05	2,64	—	8,78 (3,84-12,98)
7+7+7+12	2,05	2,05	2,05	3,52	—	9,65 (3,79-13,22)
7+7+7+18	2,05	2,05	2,05	5,28	—	11,39 (3,94-13,79)
7+7+9+9	2,05	2,05	2,64	2,64	—	9,20 (3,87-13,08)
7+7+9+12	2,05	2,05	2,64	3,52	—	10,13 (3,82-13,32)
7+7+9+18	2,05	2,05	2,64	5,28	—	12,00 (3,96-13,88)
7+7+12+12	2,05	2,05	3,52	3,52	—	11,08 (3,77-13,53)
7+7+12+18	1,93	1,93	3,30	4,96	—	12,12 (3,92-14,05)
7+9+9+9	2,05	2,64	2,64	2,64	—	9,93 (3,90-13,19)
7+9+9+12	2,05	2,64	2,64	3,52	—	10,74 (3,85-13,41)
7+9+9+18	1,96	2,52	2,52	5,05	—	12,06 (3,99-13,95)
7+9+12+12	2,05	2,64	3,52	3,52	—	11,68 (3,80-13,62)
7+9+12+18	1,85	2,38	3,17	4,76	—	12,17 (3,95-14,12)
7+12+12+12	1,97	2,37	3,37	3,37	—	12,08 (3,74-13,80)
7+12+12+18	1,73	2,97	2,97	4,45	—	12,03 (3,90-14,26)
9+9+9+9	2,64	2,64	2,64	2,64	—	10,54 (3,93-13,29)
9+9+9+12	2,64	2,64	2,64	3,52	—	11,34 (3,88-13,50)
9+9+9+18	2,42	2,42	2,42	4,84	—	12,11 (4,01-14,03)
9+9+12+12	2,64	3,52	3,52	3,52	—	12,02 (3,47-13,64)
9+9+12+18	2,26	3,02	4,53	—	—	12,32 (3,54-13,82)
9+12+12+12	2,43	3,24	3,24	3,24	—	12,38 (3,47-13,73)
9+12+12+18	2,15	2,86	4,30	—	—	12,38 (3,51-13,89)
12+12+12+12	3,03	3,03	3,03	3,03	—	11,75 (3,50-13,48)
12+12+12+18	2,69	2,69	2,69	4,04	—	12,12 (3,88-14,45)

5 indoor units						
Unit	A	B	C	D	E	Total
7+7+7+7+7	2,05	2,05	2,05	2,05	2,05	10,18 (3,97-13,71)
7+7+7+7+9	2,05	2,05	2,05	2,05	2,64	10,66 (3,99-13,80)
7+7+7+7+12	2,05	2,05	2,05	2,05	3,52	11,62 (3,95-13,97)
7+7+7+7+18	1,83	1,83	1,83	4,72	—	12,05 (4,06-14,38)
7+7+7+9+9	2,05	2,05	2,05	2,64	—	11,28 (4,00-13,87)
7+7+7+9+12	2,05	2,05	2,05	2,64	—	12,05 (4,00-13,87)
7+7+7+9+18	1,76	1,76	2,27	4,53	—	12,09 (4,08-14,44)
7+7+12+12+12	1,88	1,88	3,22	3,22	—	12,06 (3,94-14,19)
7+7+12+12+18	1,65	1,65	2,83	4,24	—	12,03 (4,05-14,55)
7+7+9+9+9	2,05	2,05	2,64	2,64	—	11,90 (4,03-13,95)
7+7+9+9+12	1,92	1,92	2,47	4,45	—	12,09 (4,00-14,11)
7+7+9+9+18	1,70	1,70	2,18	4,37	—	12,13 (4,10-14,49)
7+7+9+12+12	1,80	1,80	2,32	3,09	—	12,10 (3,96-14,26)
7+7+9+12+18	1,59	1,59	2,05	2,73	—	12,06 (4,07-14,60)
7+7+12+12+12	1,69	1,69	2,89	2,89	—	12,05 (3,92-14,38)
7+7+12+12+18	1,52	1,52	2,60	3,90	—	12,14 (4,03-14,70)
7+9+9+9+9	1,97	2,53	2,53	—	—	12,03 (4,05-14,02)
7+9+9+9+12	1,83	2,36	2,36	3,14	—	12,05 (4,02-14,18)
7+9+9+9+18	1,64	2,11	2,11	4,21	—	12,17 (4,

Overview of **outdoor units**

720 x 270 x 495 mm

Bracket distance 452 mm



765 x 303 x 555 mm

Bracket distance 452 mm



805 x 330 x 554 mm

Bracket distance 511 mm



Name of outdoor unit

ACP-09CH25AEMI/O3	ACP-09CH25AEMI/I3
ACP-09CH25AEQI/O3	ACP-09CH25AEQI/I3
ACP-12CH35AEMI/O3	ACP-12CH35AEMI/I3
ACP-12CH35AEQI/O3	ACP-12CH35AEQI/I3
ACP-12CH35AEXI/O3	ACP-12CH35AEXI/I3
ACP-12CH35AEMI/O	ACP-12CH35AEMI/I
ACP-12CH35AENI/O	ACP-12CH35AENI/I

Compatible indoor units

ACP-09CH25AERI/O+	ACP-09CH25AERI/I+
ACP-09CH25AERI/O+	ACP-09CH25AERI/I+ GOLD
ACP-09CH25AERI/O+	ACP-09CH25AERI/I+ SILVER
ACP-12CH35AEHI/O+	ACP-12CH35AEHI/I+
ACP-12CH35AEHI/O+	ACP-12CH35AEHI/I+ GOLD
ACP-12CH35AEHI/O+	ACP-12CH35AEHI/I+ SILVER
ACP-12CH35AERI/O+	ACP-12CH35AERI/I+
ACP-12CH35AERI/O+	ACP-12CH35AERI/I+ GOLD
ACP-12CH35AERI/O+	ACP-12CH35AERI/I+ SILVER
ACP-12CH35AERI/O+	ACP-12CH35AERI/I+ RED
ACP-12CH35AERI/O+	ACP-12CH35AERI/I+ SILVER MIRROR
ACP-12CC35AERI/Os	ACP-12CC35AERI/I3s
ACP-12CT35AERI/I3	ACP-12CT35AERI/I3
ACP-12DT35AERI/I3s	ACP-12DT35AERI/I3s

Name of outdoor unit

ACP-12CH35AEHI/O+	ACP-12CH35AEHI/I+
ACP-12CH35AEHI/O+	ACP-12CH35AEHI/I+ GOLD
ACP-12CH35AEHI/O+	ACP-12CH35AEHI/I+ SILVER
ACP-12CH35AEHI/O+	ACP-12CH35AEHI/I+ RED
ACP-12CH35AEHI/O+	ACP-12CH35AEHI/I+ SILVER MIRROR
ACP-12CC35AERI/Os	ACP-12CC35AERI/I3s
ACP-12CT35AERI/I3	ACP-12CT35AERI/I3
ACP-12DT35AERI/I3s	ACP-12DT35AERI/I3s

Name of outdoor unit

ACP-12CH35AEYI/Os	ACP-12CH35AEYI/I3
ACP-18CH50AERI/O+	ACP-18CH50AERI/I+ SILVER MIRROR
ACP-18CH50AERI/I+	ACP-18CH50AERI/I+
ACP-18CH50AEMI/O2s	ACP-18CH50AEMI/I2s
ACP-18CH50AEQI/O2s	ACP-18CH50AEQI/I2s
ACP-18CC50AERI/I3s	ACP-18CC50AERI/I3s
ACP-18CT50AERI/I3	ACP-18CT50AERI/I3
ACP-18CF50AERI/I3	ACP-18CF50AERI/I3
ACP-18DT50AERI/I3s	ACP-18DT50AERI/I3s
ACP-18CH50AENI/I	ACP-18CH50AENI/I
ACP-18CH50AEHI/I+	ACP-18CH50AEHI/I+
ACP-18CH50AEHI/I+ SILVER	ACP-18CH50AEHI/I+ SILVER
ACP-18CH50AEHI/I+ GOLD	ACP-18CH50AEHI/I+ GOLD
ACP-18CH50AEHI/I+ GRAY MIRROR	ACP-18CH50AEHI/I+ GRAY MIRROR

890 x 342 x 673 mm

Bracket distance 663 mm



Name of outdoor unit

ACP-24CH70AEMI/O2s

ACP-24CH70AEQI/Os

ACP-24LCAC70AERI/Os

ACP-24FS70AERI/O+

ACP-24DT70AERI/O3

Compatible indoor units

ACP-24CH70AEMI/I2s

ACP-24CH70AEQI/Is

ACP-24CC70AERI/I3

ACP-24CF70AERI/I3

ACP-24FS70AERI/I+

ACP-24DT70AERI/I3s

980 x 375 x 975 mm

Bracket distance 615 mm



Name of outdoor unit

ACP-48LCAC140AERI/O2s

ACP-55LCAC160AERI/O2s

ACP-55FSI60AERI/O+

Compatible indoor units

ACP-48CC140AERI/I3

ACP-48CFI40AERI/I3

ACP-48DTI40AERI/I3s

ACP-55CC160AERI/I3

ACP-55CFI60AERI/I3

ACP-55DTI60AERI/I3s

ACP-55FSI60AERI/I+

952 x 415 x 1333 mm

Bracket distance 634 mm



Name of outdoor unit

ACP-48FSI40AERI/O+

Compatible indoor units

ACP-48FSI40AERI/I+

946 x 410 x 810 mm

Bracket distance 673 mm



Name of outdoor unit

ACP-36LCAC105AERI/Os

Compatible indoor units

ACP-36DTI05AERI/I3s

ACP-36CC105AERI/I3

ACP-36CFI05AERI/I3

Motherboard cooling on the outdoor unit

The newly designed cooling circuits use improved airing technology - both for efficient cooling and for heat exchangers and electronic boxes, which significantly improves the performance of the unit at high ambient temperatures. It is 5 times more efficient in heat transfer compared to conventional technology.



Simply good.

M SAN Grupa d.o.o.

Exlusive distributor for Croatia

Dugoselska ulica 5
10372 Rugvica, Croatia

T +385 1 3654 900
E vivax@msan.hr

vivax.com



VIVAX PARTNER